

Greenpeace Seoul

The macroeconomic impact of decarbonising Korea's passenger car fleet



Final Report

January
2022

Cambridge Econometrics
Cambridge, UK

info@camecon.com
www.camecon.com

Contact person: Jon Stenning js@camecon.com

Authors: Matteo Caspani mc@camecon.com
Áron Hartvig adh@camecon.com
Jon Stenning js@camecon.com
An Vu av@camecon.com (Cambridge Econometrics)

Project director: Jon Stenning js@camecon.com

Cambridge Econometrics' mission is to provide clear and useful insights, based on rigorous and independent economic analysis, to address the complex challenges facing society.

www.camecon.com

Cambridge Econometrics Limited is owned by a charitable body,
the Cambridge Trust for New Thinking in Economics.

www.neweconomicthinking.org

Contents

	Page
1 Introduction	9
1.1 Background	9
1.2 Methodology	9
1.3 Structure of the report	10
2 Overview of the Scenarios	11
2.1 Scenario design	11
2.2 Vehicle sales and stock	11
2.3 Fuel demand	14
3 Modelling Assumptions	16
3.1 Common modelling assumptions	16
3.2 ICE efficiency gains	17
3.3 Vehicle costs	19
3.4 Battery costs and range	20
3.5 Fuel cell vehicle assumptions	23
3.6 Power sector assumptions	28
4 Infrastructure Requirements	30
4.1 EV infrastructure	30
4.2 Hydrogen infrastructure	32
4.3 Total cumulative investment in infrastructure	35
5 Socioeconomic Impacts	36
5.1 GDP impacts	36
5.2 Employment	38
5.3 Fossil fuel imports	39
5.4 Government revenues	40
6 Environmental Impacts	42
6.1 Impact on CO ₂ emissions	42
6.2 Impacts on emissions of particulate matter and nitrogen oxides	43
7 The Power Sector	45
7.1 Emissions associated with the consumption of electricity	45

7.2 Economic impacts with a decarbonised power sector	47
8 Conclusions	49
Appendices	50
Appendix A E3ME model description	51
A.1 Policy decisions that can be informed by the models	51
A.2 A summary appraisal of the range of results the model can offer;	51
A.3 Theoretical underpinnings	52
A.4 Summary of key strengths	53
A.5 Key limitations	53
A.6 Basic structure and data	54
A.7 Key outputs	54
A.8 Ongoing model developments	55
A.9 Model manual	56
Tables	
Table 0.1: Acronyms and abbreviations	6
Table 2.1: Description of the four core modelling scenarios	11
Table 3.1: Key assumptions used in the vehicle stock model	16
Table 3.2 Deployment of fuel efficient technologies in Petrol ICEs over the period to 2050 (as a share of all new vehicles)	17
Table 3.3 Deployment of fuel efficient technologies in Diesel ICEs over the period to 2050 (as a share of all new vehicles)	18
Table 3.4 Technology Energy Savings and Cost (\$2021)	19
Table 3.5: Battery pack size assumptions (kWh)	20
Table 3.6: Assumed battery system costs (\$2021 / kWh)	22
Table 3.7: Electric powertrain costs (motor, inverter, booster) (\$2021)	22
Table 3.8: Total cost of electric powertrain and battery (\$2021)	22
Table 3.9: Battery usable State of Charge (SOC) (%)	23
Table 3.10: Vehicle range in full electric mode (km)	23
Table 3.11 Modelling assumptions for hydrogen vehicle range and power outputs of drive motors and fuel cell systems	26
Table 4.1: Charging post definitions and costs	30
Table 4.2: Number of HRS calculation breakdown in the TECH 2030 Phase-out scenario	33
Table 4.3: Number of HRS calculation breakdown in the TECH 2035 Phase-out scenario	34
Table 5.1: Macroeconomic indicators	36
Table 7.1: Macroeconomic indicators with a decarbonised power sector	48
Figures	
Figure 2.1: Sales mix (left) and stock composition (right) in the REF scenario	12
Figure 2.2: Sales mix (left) and stock composition (right) in the CPI scenario	12
Figure 2.3: Sales mix (left) and stock composition (right) in the TECH 2035 Phase-out scenario	14

Figure 2.4: Sales mix (left) and stock composition (right) in the TECH 2030 Phase-out scenario	14
Figure 2.5 Demand of petrol, diesel, gas, hydrogen and electricity (GWh) by scenario	15
Figure 3.1: Current and projected costs of fuel cell systems (\$2021)	24
Figure 3.2: Hydrogen tank cost projections for full power fuel cell electric passenger cars (\$2021)	25
Figure 3.3 Assumed growth in global automotive fuel cell systems (units per manufacturer per year)	25
Figure 3.4 Fuel consumption assumptions for small, medium, and large FCEVs (H ₂ kg/100km)	26
Figure 3.5 Hydrogen price projections from the Hydrogen Council (2020) and the Hydrogen Economy Roadmap of Korea (2019) (\$2021 / kg)	27
Figure 3.6: Annual electricity generation by source (as a % of total generation) in the Central scenario	28
Figure 3.7: Annual electricity generation by source (as a % of total generation) in the Decarbonisation scenario	29
Figure 4.1 Cumulative investment requirements to support the EV fleet in the TECH 2030 Phase-out (left) and TECH 2035 Phase-out (right) scenarios (\$2021)	31
Figure 4.2 Capital (left) and fixed operating costs of hydrogen refuelling stations (\$2021 / H ₂ kg dispensed)	32
Figure 4.3 Cumulative investment requirements to support the FCEV fleet in the TECH 2030 Phase-out (left) and TECH 2035 Phase-out (right) scenarios	34
Figure 4.4 Total cumulative investment in infrastructure by scenario (\$2021)	35
Figure 5.1 GDP results relative to the Reference scenario	37
Figure 5.2 The employment impact per sector of the transition to low-carbon cars (TECH compared to REF)	38
Figure 5.3 Annual fossil fuel import savings (difference from REF)	39
Figure 5.4 Cumulative fossil fuel import savings over time (difference from REF)	40
Figure 5.5 Annual fossil fuel import savings (% difference from REF)	40
Figure 6.1: Average CO ₂ emissions of new cars (gCO ₂ / km)	42
Figure 6.2 Annual stock tailpipe CO ₂ emissions (KtCO ₂)	43
Figure 6.3 PM ₁₀ emission reductions from baseline in 2020 by scenario (%)	44
Figure 6.4 NO _x emission reductions from baseline in 2020 by scenario (%)	44
Figure 7.1 Annual indirect CO ₂ emissions by scenario ('Central' power sector scenario)	45
Figure 7.2 Annual indirect CO ₂ emissions by scenario ('Decarbonised' power sector scenario)	46
Figure 7.3: Cumulative CO ₂ well-to-wheel emissions reductions compared to the baseline scenario ('Central' power sector scenario)	46
Figure 7.4: Cumulative CO ₂ well-to-wheel emissions reductions in the TECH 2030 Phase-out scenario ('Decarbonised' power sector scenario)	47

Acronyms and Abbreviations

Table 0.1 sets out the acronyms and abbreviations commonly used in the report.

Table 0.1: Acronyms and abbreviations

	Abbreviation	Definition
Powertrain types		
Internal combustion engine	ICE	These are conventional petrol or diesel cars with an internal combustion engine. In the various scenarios modelled there is variation in the level of efficiency improvements to the ICE. Efficiency improvements cover engine options, transmission options, driving resistance reduction, tyres and hybridisation. Under our definition of an ICE, hybridisation is limited to micro-hybrids with start-stop technology and regenerative braking.
Hybrid electric vehicles	HEV	This definition covers full hybrid electric vehicles that can be run in pure EV mode for some time. They have a larger battery than the micro-hybrids (that are classified as ICEs).
Plug-in hybrid electric vehicle	PHEV	Plug-in hybrid electric vehicles have a large battery and an internal combustion engine. They can be plugged in to recharge the vehicle battery. EVs with range extenders are not included in the study.
Battery electric vehicle	BEV	This category refers to fully electric vehicles, with a battery but no internal combustion engine.
Fuel cell electric vehicle	FCEV	FCEVs are hydrogen fuelled vehicles, which include a fuel cell and a battery-powered electric motor.
Zero emissions vehicle	ZEV	Includes all vehicles with zero tailpipe emissions (e.g. FCEVs and BEVs).
Economic terminology		
Gross domestic product	GDP	A monetary measure of the market value of all final goods and services in the national economy.
Other acronyms		
Carbon Capture and Storage	CCS	CCS is the technology that allows to capture the CO ₂ generated from large point sources before it enters the atmosphere. The CO ₂ is then stored, for example in an underground geological formation.
Combined Heat and Power	CHP	CHP is a technology that generates electricity and captures the heat that would otherwise be wasted to provide thermal energy.
New European Driving Cycle	NEDC	Test cycle used for the certification of cars in Europe until September 2017.

Original equipment manufacturers	OEM	Refers to equipment manufacturers of motor vehicles.
Million barrels of oil equivalent	MBOE	A unit of measuring oil volumes.
Worldwide harmonized Light vehicles Test Procedure	WLTP	Test cycle used for the certification of cars in Europe since September 2017.

Executive Summary

This study assesses the economic costs and benefits of decarbonising passenger cars in the Republic of Korea. A scenario approach has been developed to envisage various possible vehicle technology futures, and then economic modelling has been applied to assess the impacts.

The analytical team was composed by Cambridge Econometrics, who worked in coordination with the Greenpeace Seoul to assess the likely economic impacts and the transitional challenges associated with decarbonising the Korean car fleet in the medium term (to 2030) and in the long term (2050).

This technical report sets out the findings from the analysis. It provides details about the charging infrastructure requirements, technology costs and economic impacts of the transition to low-carbon mobility. A summary report, presenting the key messages from the study in Korean, is also available.

The study shows that a more rapid transition to phase out combustion engine vehicles, and replace them with a fleet dominated by battery electric vehicles, will;

- Deliver rapid reductions in fuel use, and therefore in tailpipe emissions from the passenger car fleet, as well as reducing oil imports by up to almost 4 billion barrels of oil equivalent by 2050.
- Achieve major emissions reductions compared to a ‘business as usual’ case, even taking into account the indirect emissions that are related to the generation of electricity. These emissions can be further reduced if the electricity grid is decarbonised over the same period.
- Lead to beneficial economic outcomes in the medium- and long-term. As the cost of electric vehicles falls, consumers will spend less money on buying and running an electric car compared to a combustion engine vehicle; reducing spending on imported fossil fuels and increasing spending on domestic goods and services.
- Create jobs across the economy, most notably in the services and manufacturing sectors. These jobs, in the supply chain for electric vehicles but also linked to higher consumer spending across the economy, will more than outweigh the jobs lost in the conventional motor vehicle industry and fossil fuels, with up to 59,000 additional jobs in the Korean economy in 2050.

1 Introduction

1.1 Background

Low-carbon passenger transport policy

The sales of zero-emission vehicles in Korea are steadily increasing. Battery electric vehicles sold just over 45,000 units in 2020, a 32% increase on the previous year, with a further 5,823 Hyundai Nexo fuel cell vehicles being sold over the same period.

At the same time, the Korean government is setting out its future plans for fleet decarbonisation. The subsidy scheme for new alternative powertrain vehicles has been extended to 2025; this offers subsidies of up to 8 million Won for pure battery electric vehicles (BEVs) and up to 22.5 million Won for fuel cell electric vehicles (FCEVs). In addition, local government subsidies are worth up to 5 million Won and 12 million Won for BEVs and FCEVs respectively. The government has announced that 15% of vehicles sold by the car manufacturers should be BEVs, FCEVs or hybrid vehicles by 2025; although original equipment manufacturers (OEMs) are allowed to sell credits for exceeding that target to other OEMs. At the same time, the overall transition plans are relatively unambitious; just 33.3% of new vehicles in 2030 will have to be either BEVs or FCEVs, under plans unveiled by the government in early 2021.

Motivation for the study

The aim of this analysis is to explore the potential macroeconomic impact of decarbonising passenger cars in Korea; by comparing a rapid phase-out of sales of ICE vehicles by 2030 against the 'business as usual' trajectory of 33.3% in 2030. Specifically, the work will provide insight into the impacts on the domestic manufacturing industry (including relevant supply chains) and the Korean economy more broadly.

1.2 Methodology

For this study, a set of scenarios were defined in which it was assumed that a certain low-carbon vehicle technology mix would be introduced and taken up in response to vehicle CO₂ emissions regulations. The particular factors affecting consumers' decisions to purchase alternative vehicle technologies were not assessed.

The methodology involved two key stages:

- 1) Stakeholder consultation to define the scenarios and agree on the key modelling assumptions
- 2) An integrated modelling framework that involved (i) application of the Cambridge Econometrics vehicle stock model to assess the impact of alternative low-carbon vehicle sales mix on energy demand and emissions, vehicle prices, technology costs and the total vehicle cost of ownership and (ii) application of the E3ME model to assess the wider socio-economic effects of the low-carbon vehicle transition.

The two models that were applied in our framework are:

- Cambridge Econometrics' Vehicle Stock Model
- Cambridge Econometrics' E3ME model

Cambridge Econometrics' Vehicle Stock Model

The vehicle stock model calculates vehicle fuel demand, vehicle emissions and vehicle prices for a given mix of vehicle technologies. The model uses information about the efficiency of new vehicles and vehicle survival rates to assess how changes in new vehicles sales affect stock characteristics. The model also includes a detailed technology sub-model to calculate how the efficiency and price of new vehicles are affected by increasing uptake of fuel efficient technologies. The vehicle stock model is highly disaggregated, modelling 5 powertrains, 6 fuels and three different size-bands (small, medium and large)¹.

Cambridge Econometrics' E3ME model

Some of the outputs from the vehicle stock model (including fuel demand and vehicle prices) are then used as inputs to E3ME, an integrated macro-econometric model, which has full representation of the linkages between the energy system, environment and economy at a global level. The high regional and sectoral disaggregation (including explicit coverage of Korea) allows modelling of scenarios specific to Korea, and detailed analysis of sectors and trade relationships in key supply chains (for the automotive and petroleum refining industries). E3ME was used to assess how the transition to low carbon vehicles affects household incomes, trade in oil and petroleum, consumption, GDP, employment, CO₂, NO_x and particulates.

For more information and the full model manual, see www.e3me.com. A summary description of the model is also available in Appendix A of this report.

1.3 Structure of the report

The report is structured as follows:

- **Section 2** sets out the scenarios that were developed to inform the analysis and are required to answer the questions raised by the Steering Committee.
- **Section 3** presents the main modelling assumptions and technology cost data.
- **Section 4** focuses on the new recharging and refuelling infrastructure requirements for the deployment of zero emission vehicles.
- **Section 5** presents the results of the E3ME economic modelling exercise.
- **Section 6** shows the environmental impacts of each scenario.
- **Section 7** is devoted to the impacts on the power sector.
- **Section 8** sets out the conclusions of the study.

¹ See Section 3 for more details.

2 Overview of the Scenarios

2.1 Scenario design

The analysis presented in this report is based on a set of scenarios developed by Cambridge Econometrics in conjunction with Greenpeace Seoul, each assuming a different new vehicle sales mix. These represent a range of decarbonisation pathways and are designed to assess the impacts of a shift towards low carbon powertrains; they do not necessarily reflect current predictions of the future makeup of the Korean fleet of passenger cars. Uptake of each kind of vehicle is by assumption: implicitly we assume that this change is brought about by policy, but do not model that policy. The four core scenarios to be modelled for this study are summarised in Table 2.1.

Table 2.1: Description of the four core modelling scenarios

Scenario	Scenario description
REF (Reference)	<ul style="list-style-type: none"> No change in the deployment of efficiency technology or the sales mix from 2020 onwards. Some improvements in the fuel-efficiency of the vehicle stock, due to stock turnover.
CPI (Current Policy Initiatives)	<ul style="list-style-type: none"> Efficiency improvements and deployment of new powertrains to meet the 2030 new sales target (33.3% of new sales with BEVs and FCEVs). No further changes after the year 2030.
TECH 2035 Phase-out (High Technology, phase-out by 2035)	<ul style="list-style-type: none"> Efficiency improvements and ambitious deployment of EVs, mostly BEVs. Phase-out of the sale of new ICEs by 2035.
TECH 2030 Phase-out (High Technology, phase-out by 2030)	<ul style="list-style-type: none"> Efficiency improvements and ambitious deployment of EVs, mostly BEVs. Phase-out of the sale of new ICEs by 2030.

These scenarios were chosen to explore different speeds of phase-out. We base the less ambitious TECH scenario (2035 phase-out) upon the IEA's Net Zero Roadmap, which calls for the end of sales of internal combustion engine passenger cars by 2035. This is more ambitious than current political discussions in Korea but represents a sensible lower scale of ambition which could, given the right support for phase out of the use of such vehicles, be consistent with a 2050 net zero Korean economy. The more ambitious TECH 2030 scenario then provides a comparison outlining what a more rapid, while still manageable, phase-out might look like, and the socio-economic implications of such a move.

2.2 Vehicle sales and stock


In this section we outline the sales mix by powertrain deployed across each of the scenarios and vehicle size classes.

Reference scenario

The REF scenario has no deployment of advanced powertrains, and the dominance of ICEs remains in the whole projected period. Although the sales mix does not change over time, the shares of HEVs and BEVs increase in the Korean stock due to stock turnover. HEVs share reaches 8% by 2040 (up from 6% in 2030) while BEVs are 2.4% of the fleet. ICEs make up the 88% of the

stock in 2050, while HEVs and BEVs represent more than 8% and 2% respectively as shown in Figure 2.1.

Figure 2.1: Sales mix (left) and stock composition (right) in the REF scenario

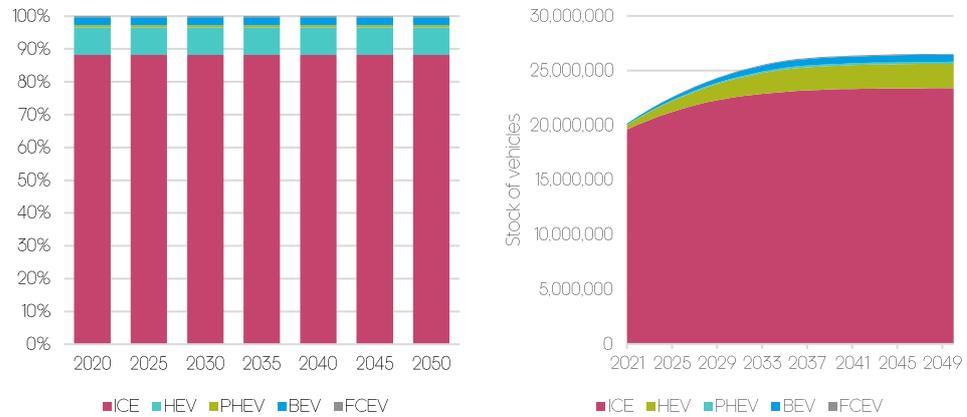


CPI scenario

The CPI scenario reflects the achievement by 2030 of the current emission reduction targets for newly registered vehicles. To meet the target of 33.3% of new sales with BEVs and FCEVs by 2030, energy efficiency technologies are introduced. In this scenario HEVs and BEVs both play a prominent role, HEVs reaching 50%, BEVs are 24.4% of annual new sales in 2030, while PHEV and FCEV shares remain moderate (3% and 8.9% respectively) (see Figure 2.2). The more rapid penetration of HEVs and BEVs into new sales translates into more than a 49% and a 24% share of the stock for the respective technologies by 2050.

Since no further targets have been announced and formally introduced, there are not any additional deployment of advanced powertrains into, or improvements in the efficiency of, new vehicles beyond 2030.


Figure 2.2: Sales mix (left) and stock composition (right) in the CPI scenario

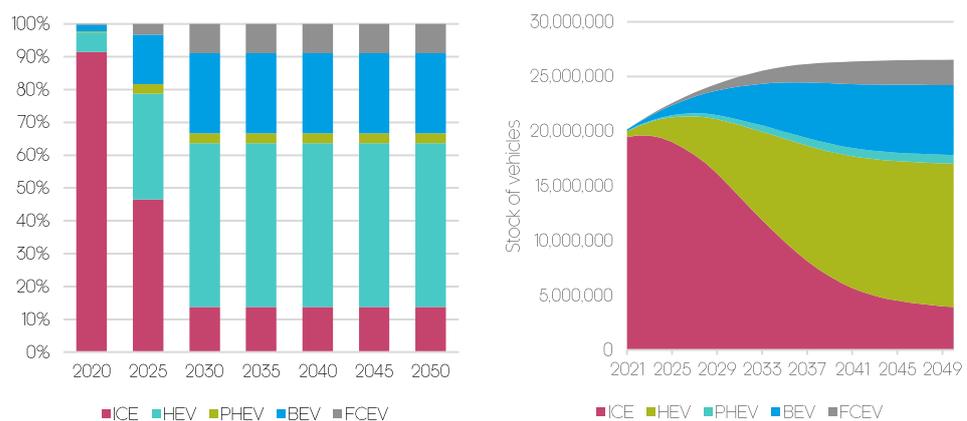

TECH 2035 Phase-out scenario

In the TECH 2035 Phase-out scenario non-zero emission vehicles are phased out of new sales by 2035. As a result, ICEs still represent the 27% of the new vehicles in 2030, converting to 22% of the stock in 2040. BEVs dominate sales from 2030 onwards and their share in the stock reaches 21% by 2030 and 91% by 2050. However, there are still almost a million ICEs and HEVs in the stock in 2050 that are more than 15 years old.


Figure 2.3: Sales mix (left) and stock composition (right) in the TECH 2035 Phase-out scenario

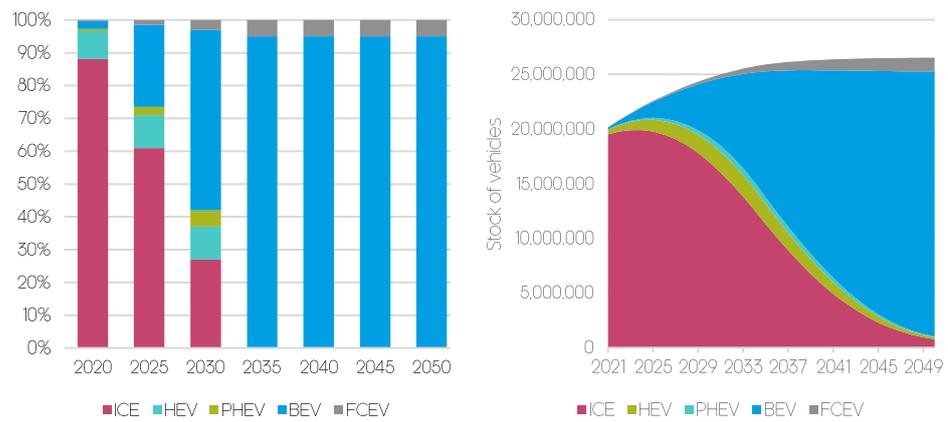

TECH 2030 Phase-out scenario

Sales and stock in the TECH 2030 Phase-out scenario are shown in Figure 2.4 below. We assume a rapid increase in the share of advanced powertrains up to 2030 when ICE vehicles are phased out of new sales. BEVs make up 95% of new sales from this date and FCEV, mostly used to cover longer ranges, are the remaining 5%². After 2030, the sales mix remains constant, but the BEV share grows rapidly in the stock reaching 93% by 2050 (up from 34% in 2030). Thanks to the early phase out of non-zero emissions vehicles the share of ICEs falls to 1.4% by 2050.

Figure 2.4: Sales mix (left) and stock composition (right) in the TECH 2030 Phase-out scenario

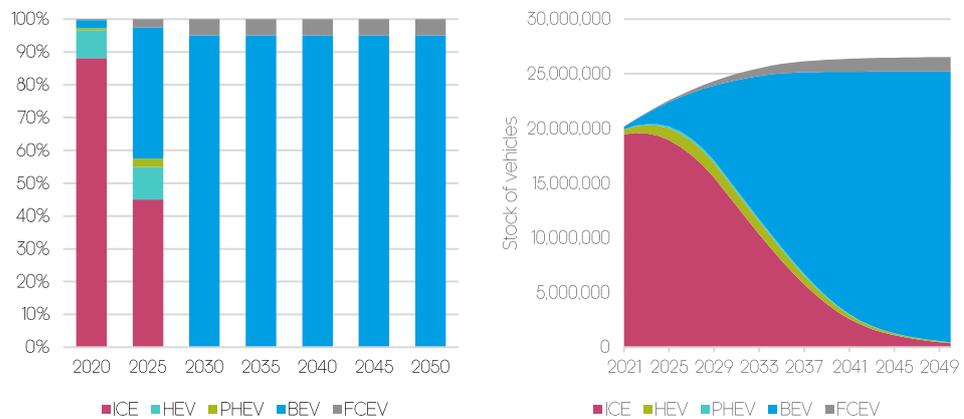

2.3 Fuel demand

The fuel demand of the Korean passenger car stock depends on its composition. Cars with advanced powertrain are substantially more energy efficient, and therefore consume less fuel. Figure 2.5 shows the combined effects of efficiency improvements and the deployment of advanced powertrains on fuel consumption by the Korean vehicle stock in each scenario. Fuel demand substantially decreases compared to the Reference scenario in


² Given the long ranges of the newest BEVs coming to market, it is not clear that FCEVs will ultimately have longer range than BEVs and therefore be needed to fulfil this role. However, substituting this small share of FCEVs for BEVs would not fundamentally change the analysis in this report.

all other scenarios. The penetration of HEVs, BEVs and FCEVs reduces annual fuel demand in 2030 in the CPI and in the TECH 2035 Phase-out scenario by 20%, in the TECH 2030 Phase out scenario by 32%, on an energy input basis.

In the TECH 2030 Phase-out and the TECH 2035 Phase-out scenarios we see a substantial reduction in demand for fossil fuels, with a 47% and a 29% reduction in petrol and diesel demand respectively relative to the Reference scenario in 2030. By 2050, the demand for petrol and diesel will have fallen by more than 98% compared to 2021 levels in both scenarios. However, phasing out ICEs 5 years earlier in TECH 2030 Phase-out scenario compared to the TECH 2035 Phase-out scenario translates to a 11% reduction in the cumulative fuel demand throughout the projection period.

Electricity and hydrogen demand grows in line with the rollout of BEVs and FCEVs. Due to the higher energy efficiency of these vehicles, their share of total energy demand is consistently lower than their share of the vehicle stock.

Figure 2.5 Demand of petrol, diesel, gas, hydrogen and electricity (GWh) by scenario

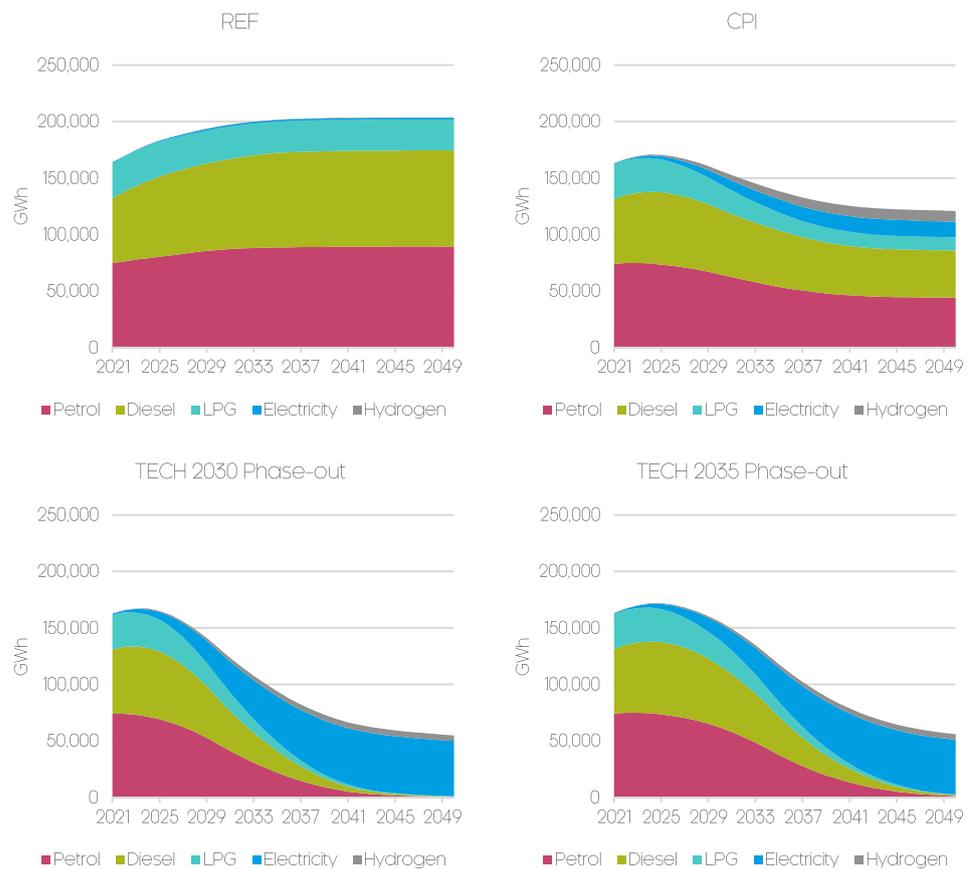

3 Modelling Assumptions

This section sets out the modelling assumptions underpinning the analysis.

The scenarios are defined by (i) the new sales mix by vehicle powertrain type, (ii) the uptake of fuel efficiency technologies, and (iii) the assumed policy targets. Key assumptions that are common to all scenarios are set out in Table 3.1. The subsequent sections provide information about our technology costs and deployment, battery costs, fuel cell vehicle and power sector assumptions.

3.1 Common modelling assumptions

Table 3.1: Key assumptions used in the vehicle stock model

	Details of assumptions used
Vehicle sales	<ul style="list-style-type: none"> Historical sales data is taken from the statistics provided by the Ministry of Land, Infrastructure and Transport (MOLIT) and by the International Organization of Motor Vehicle Manufacturers (OICA). Total new registrations are kept constant at 1.8 million vehicles sold per year, corresponding to the projected number of new cars sold in the year 2021.
Efficiency of new vehicles	<ul style="list-style-type: none"> We used Korea-specific data on new vehicle efficiency from the Korea Energy Agency for 2006 to 2019. Future efficiency of new vehicles is endogenous to the vehicle stock model, based on assumptions about the vehicle powertrain and the energy efficient technologies that are installed in the vehicle, calculated using Ricardo-AEA's cost curve study for the European Commission³.
Mileage by age cohort	<ul style="list-style-type: none"> Historical data on mileage by fuel type and size of the car is taken from the Korean Statistical Information Service (KOSIS). We assume that the average annual mileage falls gradually over the lifetime of a vehicle and varies depending on size and powertrain. To estimate how the annual mileage varies as the vehicle ages, we relied on data from the TREMOVE database.
Vehicle survival rates	<ul style="list-style-type: none"> The survival rate curve is the key assumption for converting annual sales into a vehicle stock. This curve is defined as the % of vehicles from a given sales cohort that survive to a certain age. The survival rate was derived from analysis of the age distribution of the total Korean car stock in 2020 (using stock composition data by year of registration from MOLIT). The average age of passenger cars in the Korean fleet in 2020 was 7.6 years and median lifetime of was 14 years. The same survival rate is used for all powertrains and segments. We assume an average survival rate curve for all vehicle types and assume one survival rate curve across the whole-time period.
Fuel prices	<ul style="list-style-type: none"> Historical data for fuel prices is taken from the Korea Petroleum Association (KPA). In their dataset, oil prices are broken down into prices for petrol and prices for diesel. For projections, we assume oil prices to grow in line with the IEA World Energy Outlook 2020 Stated Policies Scenario, and then we project forward the prices of petrol and diesel in line with the oil price projections.

³ Ricardo -AEA (2016), Improving understanding of technology and costs for CO₂ reductions from cars and LCVs in the period to 2030 and development of cost curves

Electricity prices	<ul style="list-style-type: none"> Electricity tariffs for EVs are sourced from the EV portal of the Korea Environment Corporation (KECO), and projections to 2030 are based on Wood McKinsey (2021). In the absence of projections up to the year 2050, electricity prices are assumed to remain constant after 2030.
Hydrogen prices	<ul style="list-style-type: none"> Hydrogen price projections are taken from the Hydrogen Council (2020) forecasts up to the year 2030, and thereafter we assume that the price remains constant, due to extensive uncertainty over the evolution of the hydrogen prices in this timeframe.
Value chains	<ul style="list-style-type: none"> In all scenarios, we assume that Korea captures a consistent share of the vehicle value chain for conventional ICEs. We assume that the assembly of battery modules and battery packs are part of the electrical equipment value chain. In the central scenarios, we assume that battery modules and battery packs for EVs are assembled in Korea proportionally to the share of electrical equipment demand that is currently met by domestic production.
Trade in motor vehicles	<ul style="list-style-type: none"> We assume that the decarbonisation of transport is taking place at a similar pace across the rest of the world. Therefore, there is no change in demand for Korean motor vehicle exports.
Air quality	<ul style="list-style-type: none"> Standards for NO_x and PM emissions of newly registered passenger cars by year of registration are taken from Transport Policy (South Korea).

3.2 ICE efficiency gains

There remains a large number of measures that can be introduced to improve the efficiency of the internal combustion engine and transmission system, and many of the technologies that are already available can make a significant impact on fuel consumption in the 2021-2025 timeframe.

Table 3.2 and Table 3.3 below show the assumptions used on the uptake of fuel-efficient technologies for petrol and diesel ICEs in the TECH scenarios. This deployment builds on the deployments schedules that Ricardo AEA developed for the UK Committee on Climate Change. These deployments were used to create technology packages to represent a central deployment of technologies over time. We then tweaked the deployment of these packages to meet the specific ambitions of our scenarios.

Where applicable (e.g. for technologies and measures that affect the body of the car rather than the engine efficiency), the fuel-efficient technologies are also assumed to be installed in the same proportion of alternative powertrain vehicles.

Table 3.2 Deployment of fuel efficient technologies in Petrol ICEs over the period to 2050 (as a share of all new vehicles)

Efficiency Technology	2020	2030	2050
Combustion improvements for engines: Level 1	80%	100%	100%
Combustion improvements for engines: Level 2	33%	82%	22%
Combustion improvements for engines: Level 3	0%	7%	78%
Direct injection - homogeneous	40%	36%	1%
Direct injection - stratified charge & lean burn	20%	54%	51%
Thermodynamic cycle improvements	1%	4%	47%
Cylinder deactivation	1%	2%	1%
Mild downsizing (15% cylinder content reduction) + boost	51%	27%	0%

Medium downsizing (30% cylinder content reduction) + boost	29%	60%	22%
Strong downsizing (>=45% cylinder content reduction) + boost	4%	13%	78%
Cooled low-pressure EGR	20%	60%	99%
Cam-phasing	60%	27%	0%
Variable valve actuation and lift	33%	73%	54%
Engine friction reduction: Level 1	65%	34%	0%
Engine friction reduction: Level 2	20%	66%	100%
Start-stop system	36%	17%	0%
Automated manual transmission (AMT)	25%	47%	2%
Dual clutch transmission (DCT)	6%	27%	20%
Continuously variable transmission (CVT)	3%	12%	78%
Optimising gearbox ratios / downspeeding	4%	2%	0%
Further optimisation of gearbox, increase gears from 6 to 8+	30%	64%	99%
Mild weight reduction (10% from the whole vehicle)	2%	1%	0%
Medium weight reduction (20% from the whole vehicle)	48%	34%	1%
Strong weight reduction (30% from the whole vehicle)	21%	66%	100%
Aerodynamics improvement 1 (Cd reduced by 10%)	20%	40%	2%
Aerodynamics improvement 2 (Cd reduced by 20%)	10%	36%	18%
Low rolling resistance tyres 1	2%	10%	81%
Low rolling resistance tyres 2	45%	36%	2%
Reduced driveline friction 1	37%	64%	99%
Reduced driveline friction 2	23%	20%	0%
Low drag brakes	28%	80%	100%
Thermal management	36%	47%	0%
Thermo-electric waste heat recovery	12%	53%	100%
Auxiliary (thermal) systems improvement	8%	27%	83%
Auxiliary (other) systems improvement	29%	60%	99%

Table 3.3 Deployment of fuel efficient technologies in Diesel ICEs over the period to 2050 (as a share of all new vehicles)

Efficiency Technology	2020	2030	2050
Combustion improvements for engines: Level 1	80%	100%	100%
Combustion improvements for engines: Level 2	33%	82%	22%
Combustion improvements for engines: Level 3	0%	7%	78%
Mild downsizing (15% cylinder content reduction) + boost	51%	27%	0%
Medium downsizing (30% cylinder content reduction) + boost	29%	60%	22%
Strong downsizing (>=45% cylinder content reduction) + boost	4%	13%	78%
Cooled low-pressure EGR	20%	60%	99%
Variable valve actuation and lift	33%	73%	54%
Engine friction reduction: Level 1	65%	34%	0%
Engine friction reduction: Level 2	20%	66%	100%
Start-stop system	36%	17%	0%
Automated manual transmission (AMT)	4%	2%	0%
Dual clutch transmission (DCT)	30%	64%	99%
Continuously variable transmission (CVT)	2%	1%	0%
Optimising gearbox ratios / downspeeding	48%	34%	1%
Further optimisation of gearbox, increase gears from 6 to 8+	21%	66%	100%
Mild weight reduction (10% from the whole vehicle)	20%	40%	2%
Medium weight reduction (20% from the whole vehicle)	10%	36%	18%

Strong weight reduction (30% from the whole vehicle)	2%	10%	81%
Aerodynamics improvement 1 (Cd reduced by 10%)	45%	36%	2%
Aerodynamics improvement 2 (Cd reduced by 20%)	37%	64%	99%
Low rolling resistance tyres 1	23%	20%	0%
Low rolling resistance tyres 2	28%	80%	100%
Reduced driveline friction 1	36%	47%	0%
Reduced driveline friction 2	12%	53%	100%
Low drag brakes	8%	27%	83%
Thermal management	29%	60%	99%
Thermo-electric waste heat recovery	0%	4%	25%
Auxiliary (thermal) systems improvement	32%	87%	100%
Auxiliary (other) systems improvement	20%	53%	91%

3.3 Vehicle costs

Our cost assumptions for the improvements mentioned above are based on Ricardo-AEA (2015).

The costs in Table 3.4 are taken from the latest Ricardo-AEA (2015) datasets developed for the European Commission. Table 3.4 summarises the main technologies included and the associated energy savings and cost increase.

Table 3.4 Technology Energy Savings and Cost (\$2021)

Efficiency Technologies	Energy saving	Production Cost (\$2021)		
		Small car	Medium car	Large car
Combustion improvements for engines: Level 1	2-3%	77	77	77
Combustion improvements for engines: Level 2	2-3%	16	17	17
Combustion improvements for engines: Level 3	2-7%	611	611	855
Direct injection - homogeneous	5%	277	277	387
Direct injection - stratified charge & lean burn	7-	570	750	997
	11%			
Thermodynamic cycle improvements	13-	689	698	965
	25%			
Cylinder deactivation	2-3%	303	303	303
Mild downsizing (15% cylinder content reduction) + boost	2-3%	126	166	166
Medium downsizing (30% cylinder content reduction) + boost	2-7%	214	315	322
Strong downsizing (>=45% cylinder content reduction) + boost	8-	505	582	589
	10%			
Cooled low-pressure EGR	2-3%	133	143	196
Cam-phasing	4%	95	100	155
Variable valve actuation and lift	1-7%	266	280	435
Engine friction reduction: Level 1	1-2%	68	68	68
Engine friction reduction: Level 2	3-3%	128	128	128
Start-stop system	1-2%	152	174	220
Automated manual transmission (AMT)	1-2%	498	498	523
Dual clutch transmission (DCT)	1-2%	527	562	582

Continuously variable transmission (CVT)	2-3%	1,027	1,027	1,079
Optimising gearbox ratios / downspeeding	1-5%	93	93	93
Further optimisation of gearbox, increase gears from 6 to 8+	3-9%	176	176	176
Mild weight reduction (10% from the whole vehicle)	5-7%	46	60	78
Medium weight reduction (20% from the whole vehicle)	11-12%	279	361	453
Strong weight reduction (30% from the whole vehicle)	17-19%	1,176	1,528	1,912
Aerodynamics improvement 1 (Cd reduced by 10%)	3-4%	62	64	81
Aerodynamics improvement 2 (Cd reduced by 20%)	5-7%	195	202	254
Low rolling resistance tyres 1	2-4%	44	51	50
Low rolling resistance tyres 2	5-8%	123	130	129
Reduced driveline friction 1	1%	33	33	33
Reduced driveline friction 2	2%	147	147	147
Low drag brakes	1%	84	84	84
Thermal management	2%	257	257	296
Thermo-electric waste heat recovery	2-3%	743	743	1,002
Auxiliary (thermal) systems improvement	2-3%	155	164	195
Auxiliary (other) systems improvement	2-3%	234	252	307

Note(s): Costs are mass manufacturing cost

3.4 Battery costs and range

Definitions

A key input to the modelling of EV cost is the battery pack size (kWh). Future battery pack sizes will depend both on future reductions in battery costs and Original Equipment Manufacturer (OEM) design choices to balance vehicle driving ranges against cost based on customer preferences. Currently, the smallest batteries for BEV cars are around 30 kWh, whereas the largest range up to 100 kWh. OEM statements suggest that medium size BEVs will target driving ranges of 300km or more, while large vehicles will have longer ranges of 500km or more, similar to the Tesla Model S. Taking these trends into consideration, Table 3.5 shows the assumed battery pack sizes for PHEV and BEV passenger cars between 2021 and 2050.

Table 3.5: Battery pack size assumptions (kWh)

Battery sizes (kWh)					
Powertrain	Market segment	2021	2030	2040	2050
PHEV	Small	7.0	6.3	5.6	4.9
PHEV	Medium	10.0	9.0	8.0	7.0
PHEV	Large	15.0	13.5	12.0	10.5

BEV	Small	45.0	45.0	45.0	45.0
BEV	Medium	60.0	60.0	60.0	60.0
BEV	Large	90.0	90.0	90.0	90.0

We have used different assumptions for PHEVs and BEVs on changes in battery capacity. For PHEVs, it is assumed that OEMs maintain an electric driving range of approximately 50km (medium sized vehicle), and decrease pack sizes over time as vehicle efficiency improvements lead to reductions in energy use per km. For BEVs, we assume that pack sizes are held constant, and vehicle driving ranges increase over time as improvements in battery energy density reduce pack weight and vehicle-level efficiency improvements reduce energy consumption per kilometre.

The battery sizes are intended to be representative, since in practice there are a wide range of options and specifications available to manufacturers, leading to a wide range of costs, performance and range.

Costs and energy savings

The primary influence on plug-in vehicle cost and performance is battery technology, since other components such as electric motors are already well developed and have more limited potential for future improvements. There are four key areas of battery technology where breakthroughs could happen:

- reducing the cost
- increasing the specific energy (to improve vehicle range/performance for a given battery weight or reduce weight for a given battery kWh capacity)
- improving usable operational lifetime
- reducing recharging time, for example allowing rapid charging at 150 kW+ with no impact on battery state of health

According to estimates by Bloomberg New Energy Finance (BNEF), the price of lithium-ion batteries in 2020 was \$137/kWh – a drop of 89% since 2010 (BNEF, 2021)⁴. Price decreases between 2010 and 2020 are in part due to technology improvements and economies of scale. Battery pack prices are predicted to continue to drop in the future, but at a slower pace than in previous years.

All of the considered scenarios use a single battery cost projection based on BNEF (2021), according to which battery prices will fall further to about \$54/kWh by 2030. Given the absence of projections up to 2050, we do not assume further price changes after the year 2030; this likely leads to a pessimistic view of future battery prices post-2030. Table 3.6 shows the projected battery system costs for PHEVs and BEVs.

⁴ [BNEF \(2021\), Battery Pack Prices Cited Below \\$100/kWh for the First Time in 2020, While Market Average Sits at \\$137/kWh.](#)

Table 3.6: Assumed battery system costs (\$2021 / kWh)

Battery system costs (\$2021/kWh)					
Powertrain	Market segment	2020	2030	2040	2050
EVs	All	126	54	54	54

The costs presented in Table 3.6 refer to both the battery and the battery system (pack), but not to the electric drive powertrain; costs for the latter are shown in Table 3.7. The costs are lower per kWh for a larger battery than a small battery.

Table 3.7: Electric powertrain costs (motor, inverter, booster) (\$2021)

Powertrain	Market segment	2020	2030	2040	2050
PHEV	Small	1,034	932	842	762
PHEV	Medium	1,164	1,050	948	858
PHEV	Large	1,436	1,296	1,171	1,059
BEV	Small	1,034	932	842	762
BEV	Medium	1,164	1,050	948	858
BEV	Large	1,436	1,296	1,171	1,059

Overall, the total battery system and powertrain costs are shown in Table 3.8 for each of the different market segments based on the derived battery size.

Table 3.8: Total cost of electric powertrain and battery (\$2021)

Powertrain	Market segment	2020	2030	2040	2050
PHEV	Small	1,922	1,271	1,143	1,026
PHEV	Medium	2,434	1,534	1,378	1,234
PHEV	Large	3,341	2,021	1,815	1,623
BEV	Small	6,748	3,351	3,261	3,181
BEV	Medium	8,782	4,275	4,173	4,083
BEV	Large	12,864	6,134	6,009	5,897

Battery range State of Charge (SOC) assumptions (Table 3.9) are applied to derive the useable energy of the battery. The expected range (Table 3.10) is then

derived based on the test cycle efficiency of the vehicle (in all electric mode, under the Worldwide Harmonised Light Vehicles Test Procedure)⁵.

Table 3.9: Battery usable State of Charge (SOC) (%)

Battery usable SOC for electric range (%)					
Powertrain	Market segment	2020	2030	2040	2050
PHEV	Small	70%	72%	74%	75%
PHEV	Medium	70%	72%	74%	75%
PHEV	Large	70%	72%	74%	75%
BEV	Small	85%	90%	90%	90%
BEV	Medium	85%	90%	90%	90%
BEV	Large	85%	90%	90%	90%

Table 3.10: Vehicle range in full electric mode (km)

All electric range (km – WLTP)					
Powertrain	Market segment	2020	2030	2040	2050
PHEV	Small	47	47	45	46
PHEV	Medium	52	52	50	51
PHEV	Large	61	61	59	60
BEV	Small	300	342	361	412
BEV	Medium	308	350	371	424
BEV	Large	363	412	437	500

Note(s): The ranges in this table represent average vehicles in each market segment. Within each segment, we expect a range of battery sizes to be made available to suit different use cases, including vehicles with much larger batteries and therefore longer ranges. Indeed, there are already BEVs on the market with much longer ranges than those envisaged here.

The assumed dynamic around battery ranges is that, as battery costs fall, OEMs will use this to simultaneously reduce final vehicle prices and also extend the range of these vehicles modestly. If battery prices fall more rapidly than anticipated in the modelling, it is possible that average vehicle ranges could increase more rapidly.

3.5 Fuel cell vehicle assumptions

The assumptions regarding FCEVs (e.g. fuel cell system costs, hydrogen tank costs, driving range, system power outputs and hydrogen production costs) build on work carried out by Element Energy for several national hydrogen mobility initiatives, as well as the cross-cutting Hydrogen Mobility Europe


⁵ The projected efficiency under the NEDC are converted to WLTP equivalent as per the conversion of each efficiency measure given in Ricardo-AEA (2015). Starting conversion factors for 2015 were sourced from ADAC EcoTest laboratory results. The difference in kWh/km between NEDC and WLTP is typically around 5%.

(H2ME) demonstration project funded by the Fuel Cells and Hydrogen Joint Undertaking. They are based on aggregated and anonymised data provided by technology suppliers and vehicle manufacturers, data from real-world deployments and published data from the national hydrogen mobility initiatives and academic research.

Fuel cell system and hydrogen tank costs

The two largest components influencing the costs of FCEVs are the fuel cell system and the high-pressure hydrogen tank. Future values for these costs are subject to significant uncertainty, since they depend greatly on improvements at a technology level (for example reducing the precious metal content in the stack) and substantial increases in manufacturing volumes. For current costs, representing very low production volumes, fuel cell costs of \$113/kW are assumed as a central estimate.

Figure 3.1: Current and projected costs of fuel cell systems (\$2021)

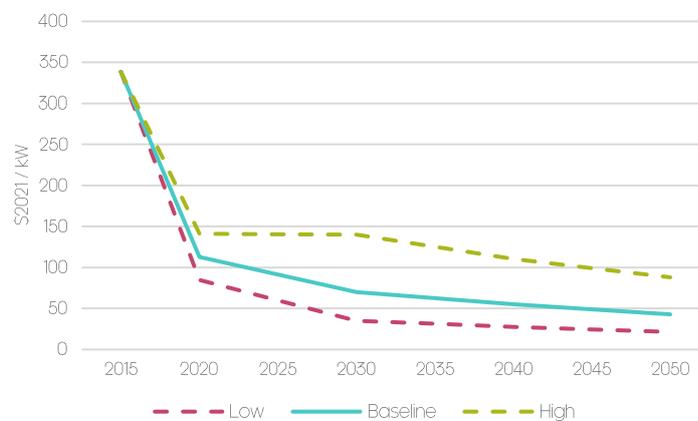

In 2021 and beyond, significant cost reductions in fuel cell systems are expected due to technology improvements and increasing production volumes. Future assumptions are based on the EU Powertrains Study and the UK’s Hydrogen Technology Innovation Needs Assessment (TINA) carried out by Element Energy and the Carbon Trust. These costs would result in a 100kW fuel cell system costing \$5,000-6,000 by 2030. Figure 3.2 shows the expected cost progression of hydrogen tanks. These are based on the UK TINA and bilateral discussions with vehicle manufacturers. Like fuel cell costs, significant cost reductions are expected as manufacturing volumes increase, with a reduction of at least 50% relative to today’s prices by 2030.


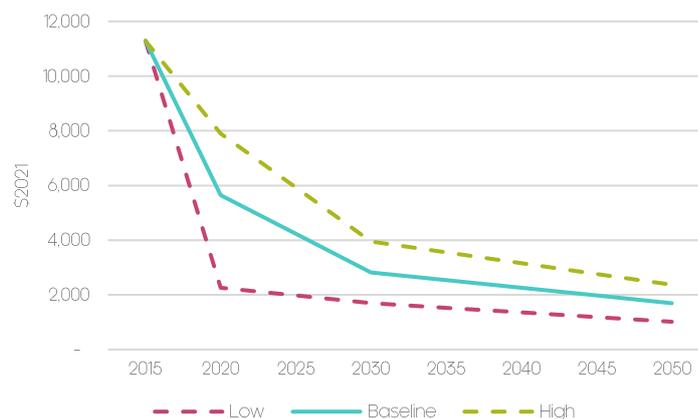


Figure 3.2: Hydrogen tank cost projections for full power fuel cell electric passenger cars (\$2021)

Low and high estimates of fuel cell and hydrogen tank trends (from the TINA) are also provided for use in sensitivity analysis, reflecting higher and lower sales volume assumptions from system manufacturers as shown in Figure 3.3.

Figure 3.3 Assumed growth in global automotive fuel cell systems (units per manufacturer per year)

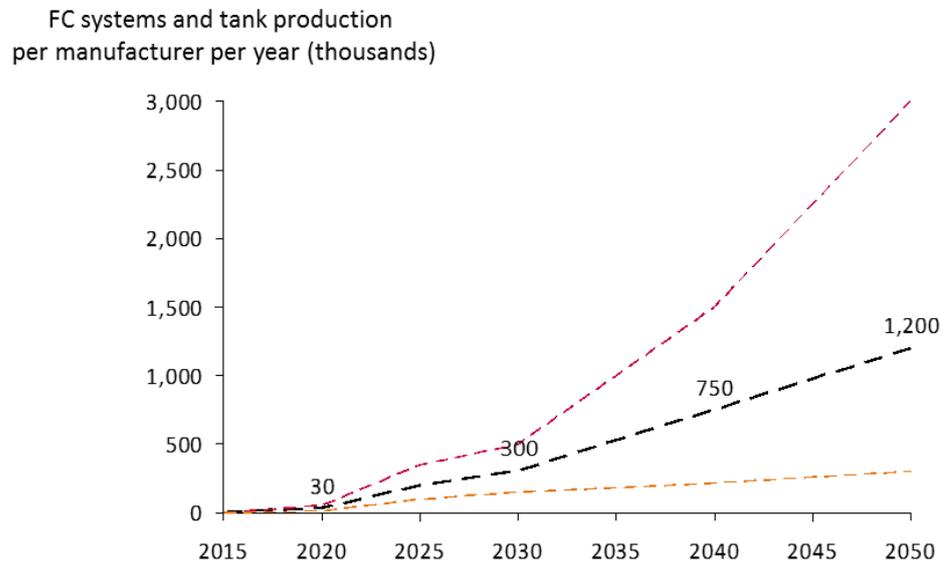

Driving range and system power outputs

The average FCEV driving range between refuelling events is currently around 500 km, which is higher than most current generation battery electric vehicles. Range assumptions and the assumed motor and fuel cell powers are shown below in Table 3.11. As fuel cell costs decrease and fuel efficiency improves, vehicle manufacturers may choose to increase vehicle range, or reduce hydrogen tank sizes while keeping the range constant. This also applies to fuel cell and motor powers, where manufacturers can trade off increased power (and hence increased performance) with cost reduction for a given performance. These decisions will depend on perceived customer needs as well as technology progression. A similar trade-off exists for range-extended fuel cell vans, where the relative sizes of the battery and fuel cell stack can be optimised, based on the future rates of cost reduction in each technology.

As a simplifying assumption, motor/fuel cell powers are assumed to remain constant throughout the study timeframe. This is consistent with manufacturers favouring cost reduction to improve total cost of ownership relative to conventional vehicles, rather than ‘spending’ technology improvements on better performance. Fuel tank sizes are assumed to remain constant and therefore any fuel efficiency improvements result in an increased driving range. This increase in range is similar to a recent Hyundai prototype (Nexo, 609 km range), and also reflects the need to provide similar operating range to diesel cars and maintain an operational advantage compared with battery electric vehicles for long range duty cycles (with charging time less than 5 minutes for a FCEV).

Table 3.11 Modelling assumptions for hydrogen vehicle range and power outputs of drive motors and fuel cell systems


Market segment	Year	Driving range (km)	Electric motor power (kWh)	Fuel cell system power (kWh)
Small	2020	399	70	70
Small	2050	515	70	70
Medium	2020	509	100	100
Medium	2050	662	100	100
Large	2020	555	125	125
Large	2050	720	125	125

Hydrogen fuel consumption

Fuel consumption assumptions for FCEV vehicles were sourced from historical estimates provided by the Korea Energy Agency for the year 2019. The future evolution of fuel consumption values is endogenously calculated in the vehicle stock model. Fuel consumption is expected to decrease in future model generations, partly due to increasing fuel cell efficiency but also through efficiency savings at a vehicle level such as weight reduction or improved aerodynamics.

Figure 3.4 presents the assumed evolution of fuel consumption for small, medium, and large FCEVs used in this study. Fuel consumption levels fall steadily over time, reflecting increased efficiency.

Figure 3.4 Fuel consumption assumptions for small, medium, and large FCEVs (H₂ kg/100km)

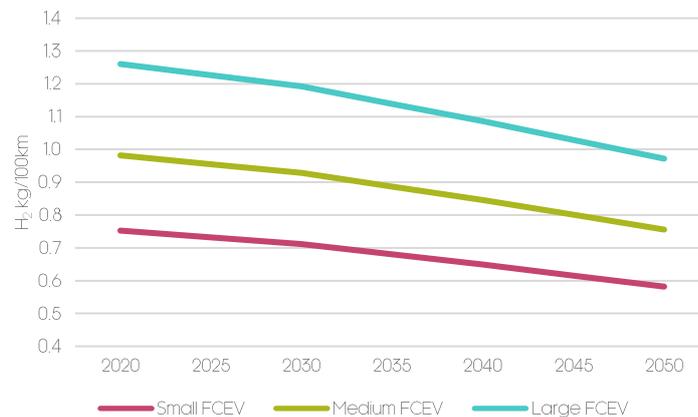


The price of hydrogen

The production of hydrogen is expected to increase substantially in coming years, driving down the price globally. Currently there are two major technologies used to produce hydrogen: Steam Methane Reforming (SMR) and electrolysis. While SMR has significantly lower costs, the related carbon dioxide emissions are substantial. However, emissions can be reduced by around 90% through carbon capture and storage (CCS) technologies. Hydrogen generated by steam methane reforming with CCS is labelled as blue hydrogen. Hydrogen production through electrolysis using renewable electricity on the other hand has no CO₂ emissions.

Figure 3.5 shows the projected average hydrogen price of the [Hydrogen Council \(2020\)](#) and the [Hydrogen Economy Roadmap of Korea \(2019\)](#). Forecasts are only up to the year 2030 and 2040 respectively, thus, thereafter we assume that the price remains constant, due to extensive uncertainty over the evolution of the hydrogen prices in this timeframe. Although the price projections are not specific to Korea, in this study we base our hydrogen price assumptions on the analysis of the [Hydrogen Council \(2020\)](#) as we consider their short term price projection of \$13.15 more feasible.

Figure 3.5 Hydrogen price projections from the Hydrogen Council (2020) and the Hydrogen Economy Roadmap of Korea (2019) (\$2021 / kg)

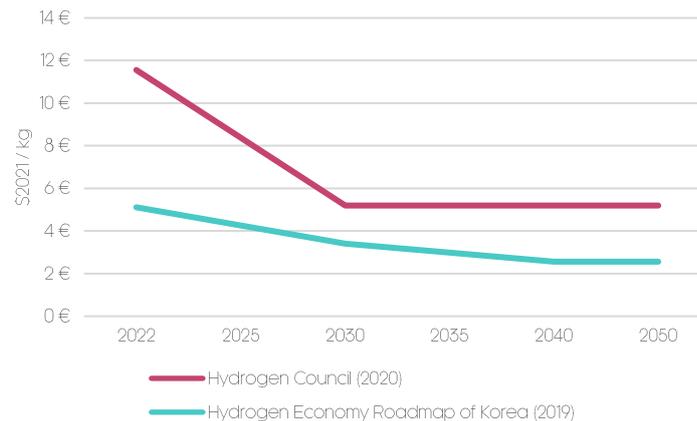

Hydrogen generation pathways

In this report, we have not considered specific pathways for the generation of hydrogen in detail, instead using existing predictions for hydrogen prices. However, it is important to note that these different pathways have implications for the characteristics of hydrogen, including the CO₂ footprint and the final price for consumers.

While green hydrogen offers the greatest emission savings of any hydrogen pathway, it requires large amounts of electricity, with extensive energy losses in both the well-to-tank and tank-to-wheel phases meaning that around three times as much electricity is needed to provide the same final energy as a battery electric vehicle. Although the industry is optimistic that direct power purchase agreements and efficient transportation can bring green hydrogen prices down in future, due to this relative efficiency green hydrogen is always likely to be a more expensive fuel than electricity.

Blue hydrogen (produced from steam methane reforming, with carbon capture technology used to remove much of the CO₂) is touted as an alternative zero carbon method of producing, at competitive costs, substantial volumes of hydrogen in the future. However, there is substantial uncertainty surrounding the technology, with the potential for very high leakage rates posing a threat to its potential environmental impacts, and questions about how cost-competitive blue hydrogen can be with a dependence on CCS at a scale that has not yet been achieved in practice.

Finally, grey hydrogen cannot be considered a long-term option, simply because of the substantial emissions associated with the steam methane reforming methods used to produce the gas from fossil fuels. It should be noted that grey hydrogen dominates global hydrogen production, and is currently by far the cheapest method of hydrogen production; the alternative

technologies need therefore to overcome series economic hurdles in order to be considered a viable zero-carbon fuel.

3.6 Power sector assumptions


The structure of the power sector, and the renewable content of electricity generation in particular, has important implications for the results of the study:

- It determines the net environmental impact of the electrification of the vehicle fleet;
- It affects the economic and employment impacts of the transition.

Power sector structure

In this study, we consider two scenarios for the evolution of the power sector in Korea up to the year 2050. In the ‘Central’ scenario, no further policies affecting the sector are assumed, with the result that the power generation mix does not substantially vary over the projected period, as represented in Figure 3.6⁶. Therefore, this scenario does not assume a decarbonisation of the power generation sector.

Figure 3.6: Annual electricity generation by source (as a % of total generation) in the Central scenario

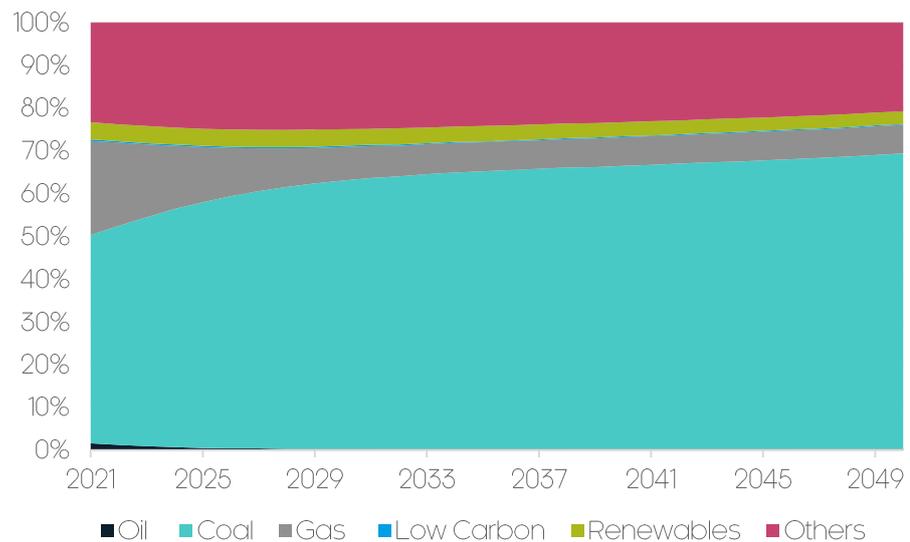

In contrast, in the ‘Decarbonisation’ scenario, we assume that additional policies will be introduced in Korea to phase-out electricity generation from fossil fuels (coal, oil, and natural gas) by 2050. The electricity generation mix therefore radically changes over the period, as showed in Figure 3.7. This mix is based broadly on the [ninth basic plan for electricity](#), published in December 2020.


The modelling of a decarbonised energy system highlights some of the challenges of achieving this in Korea; there is substantial renewables potential, but current technologies are likely to be insufficient to meet all electricity demand by 2050. While nuclear (classified as part of ‘Others’) continues to decline throughout the period, there is a substantial tranche of electricity demand that must be met by other ‘Low Carbon’ sources. This could include via an interconnector with China, the importing of low carbon fuels (such as hydrogen for use in grid fuel cells) or, probably least desirably, the

⁶ The category ‘Others’ include electricity generated from Nuclear, fuel cells, and CHP plants.

use of CCS technologies which, given the lack of suitable storage sites in Korea, would require the exporting of the CO₂ to a willing recipient.

As the power sector undertakes a transition to renewable sources in the ‘Decarbonisation’ scenario, this directly influences the economic and employment impacts of the considered scenarios in the road transport sector. These impacts are presented in more detail in Chapter 7.

Figure 3.7: Annual electricity generation by source (as a % of total generation) in the Decarbonisation scenario

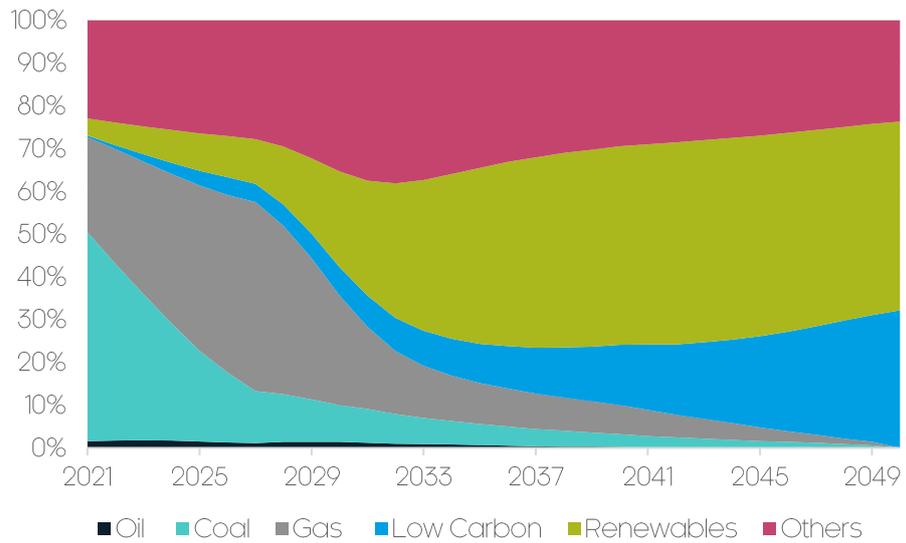

4 Infrastructure Requirements

This section describes the definition, costs, and deployment of electric charging posts, as well as the deployment of hydrogen refuelling stations. It also provides a breakdown of our calculation for total infrastructure requirements.

4.1 EV infrastructure

Definition and costs for EV charging points

We adopt the definitions and costs for charging points as presented in this section. These definitions and costs were sourced from recent literature (e.g. Cambridge Econometrics and CE Delft) and agreed upon to reflect the Korean market.

Table 4.1 represents the range of available charge points to end users and illustrates the characteristics and costs of charging posts. Within each 'archetype', significant variation in price and features would be expected to occur in the real world.

Table 4.1: Charging post definitions and costs

Main application	Charging point features	Power (kW)	Charge time - 45kWh battery (approx.)	Cost (\$2021)
				Production & Installation
Residential	Wall box One plug	3 kW	15 hours	1,501
Workplace	Ground mounted Two plugs	7 kW	6.4 hours	3,725
Parking (on-street and shopping centres)	Ground mounted DC fast charger	50 kW (25 Kw for 2 chargers)	54 minutes (1.8h for 25 kW)	35,557
Rapid chargers on motorways site	DC super-fast charger	150 kW (75kW for 2 chargers)	18 minutes (36 minutes for 75kW)	75,207

Residential charging posts

For the residential sector, we consider a wall box with a power of 3 kW as standard option, allowing slow recharge of the vehicles overnight. This solution is sometimes offered through OEM dealerships either with an OEM branded charging point or through a partnership with an independent provider. In some instances, consumers will choose not to install a wall box and simply charge their EVs from a standard socket to avoid paying capacity charges. These low-powered options are suitable for many consumers as typical vehicles require only a partial charge overnight to 'top up' the charge used in a single day, rather than a substantial charge, so in practice average charging times will be lower than stated in the table above.

For residential sites with no access to a private driveway or garage, solutions are similar to a private domestic charging point with the addition of options for metering electricity and controlling access to authorised users. In the workplace, we consider a ground mounted charging post at company parking lots with a power of 7 kW, allowing a slow recharge over working hours.

Public charging posts

For public stations in public places such as on street parking spaces, dedicated car parks, and retail car parks, a ground mounted DC fast charger with a power of 50 kW (or 25 kW for two chargers) is assumed. The choice of the installed power will depend on parameters such as parking time (the longer the customers typically spend in a retail, the lower the kW can be while still able to provide valuable range) and connection costs.


Rapid charging sites

For stations on motorways, a DC super-fast charger of 150 kW (alternatively, 75 kW for two chargers) is assumed, allowing for a full recharge between 18 and 36 minutes for a BEV with a 45 kWh battery pack. High power rates are necessary to maintain acceptable charging times for vehicles with large batteries. Higher-powered chargers (such as the Ionity, up to 350kW, and Tesla supercharger version 3 at 250kW) are available, and would reduce charge times still further, although would have higher infrastructure costs. The values taken in our analysis might therefore represent an average between these highest-power options and a mix of lower powered chargers.

Financing of EV charging posts deployment

The additional charging requirements in each year are multiplied by the cost per post in that year. To project changes in charging infrastructure costs out to 2050, we apply a 10% learning rate per doubling of cumulative charging capacity, meaning that as the total capacity of installed chargers doubles, the cost of additional chargers comes down by 10%. We can expect production costs to decrease due to advancements in manufacturing techniques and economies of scale. The actual cost is therefore dependent on the uptake scenario modelled. Figure 4.1 shows the estimated cumulative investment requirements to support the EV fleet in the TECH 2030 Phase-out and TECH 2035 Phase-out scenarios.

Figure 4.1 Cumulative investment requirements to support the EV fleet in the TECH 2030 Phase-out (left) and TECH 2035 Phase-out (right) scenarios (\$2021)

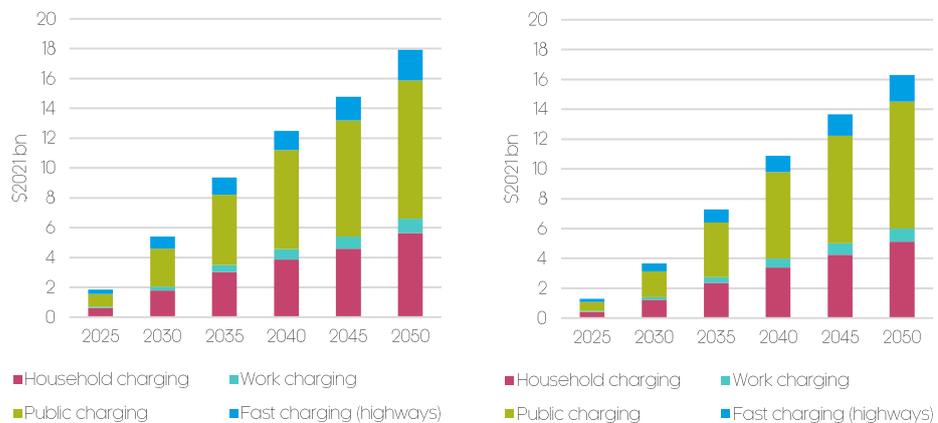

We assume that all private infrastructure spending (household and work charging points) are paid for upfront by the consumer when the vehicle is purchased. This is either explicit (e.g. consumers paying for chargers installed on their private property) or implicit (OEMs installing chargers as part of

vehicle purchase and adding an appropriate premium to the purchase price of the vehicle to cover this cost). Investment in public infrastructure and rapid charging points is assumed to be paid for by owners of shopping centres, car parks and motorway service stations. We assume that these costs are fully passed on to customers: the cost of infrastructure in shopping centres and motorway services is ultimately paid for by an increase in prices for consumers in wholesale and retail markets.

Finally, we make the simplifying assumption that site owners or private businesses install the chargers without the financial aid offered by public subsidies. This does not have a large bearing on the economic results. Instead, if we had assumed that the public charging posts are publicly financed, then to balance the government budget in the scenario, tax rates would have to be raised elsewhere, and the cost would still ultimately be borne by businesses and consumers.


4.2 Hydrogen infrastructure

Refuelling station costs

Fuel cell vehicles are refuelled by hydrogen refuelling stations, dispensing high pressure gaseous hydrogen into the vehicles' on-board storage tanks. The main elements of a hydrogen refuelling station (HRS) are a compressor, hydrogen storage, pre-cooling/refrigeration equipment and dispensers. The exact configuration of an HRS, in terms of its size, the pressure of primary and buffer storage and dispensing rate per hour, varies according to the station supplier and the intended use.

HRS costs in this study are based on three different station sizes (50, 100 and 500 kg per day), dispensing 700 bar hydrogen and meeting the performance specifications set out in the SAE J2601 international standard. Cost assumptions for the stations are drawn from the 'Fuelling Italy's Future' study and are presented below. Figure 4.2 shows the assumed capital and fixed operating costs for each HRS dispensing 700 bar hydrogen.

Figure 4.2 Capital (left) and fixed operating costs of hydrogen refuelling stations (\$2021 / H₂ kg dispensed)

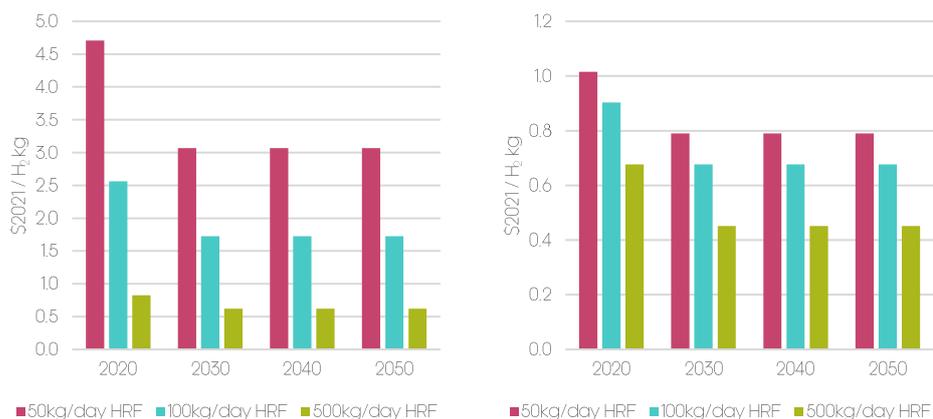

Costs are also shown per kilogram of capacity, assuming a 20-year lifetime, 7% cost of capital and a utilisation factor increasing over time to 75%. These costs are appropriate for hydrogen stations receiving hydrogen deliveries by truck, or from an on-site electrolyser. The costs for the electrolyser itself are included in the production cost section.

Both capital and fixed operating costs are expected to decrease over the period to 2030 due to design improvements, increased manufacturing volumes

and more efficient supply chains. However, we assume that the technology reaches maturity at this point, and costs are kept constant afterwards. By 2030, capital costs represent a relatively small proportion of the expected hydrogen selling price, particularly for the larger station sizes. Hence, possible breakthroughs in HRS design that lead to much lower costs than predicted here -while beneficial particularly in terms of reducing capital investment for the early network - do not strongly affect the overall economics of hydrogen refuelling.

Fixed operating costs for HRS are shown in Figure 4.2. Significant cost reductions are expected in future, due to more efficient supply chains, use of local labour for maintenance rather than engineering teams from the equipment supplier, and increased component lifetimes. Again, costs beyond 2020 are a relatively small proportion of the overall hydrogen cost structure, which is dominated by the cost of the hydrogen itself. This is similar to the cost structure for conventional petrol stations, and unlike that of electric charging points, whose capital costs are high in proportion to the value of the electricity supplied.

Deployment of hydrogen infrastructure

The future rate of deployment of HRS in the Korean market for hydrogen is strongly linked to the roll-out of FCEVs, particularly the step change in sales driven by lower cost, second generation vehicles beyond 2020. In this study, the number of stations in Korea (and implied capital and operating costs) is directly linked to the projected uptake of fuel cell vehicles across scenarios and to the expected volume of vehicles that can be supported per refuelling station. To model the uptake of HRS, we have assumed an initial deployment based only on refuelling stations of reduced size (between 50 and 100 kg / day) which will be gradually phased-out after 2030 to the advantage of stations with larger capacity (500 kg / day).

Besides defining the relative roll-out of each type of HRS, we estimated the total number of HRS that can support the fleet of FCEV consistently with a series of density assumptions. Specifically, we assumed a ratio of 100 FCEVs per 50 kg / day HRS in 2030 increasing to 150 by 2050, a ratio of 250 FCEVs per 100 kg /day HRS in 2030 increasing to 300 by 2050, and a ratio of 1,250 FCEVs per 500 kg / day HRS in 2030 increasing to 2,000 by 2050.

Table 4.2 and Table 4.3 provide an overview of the hydrogen infrastructure deployment in the TECH 2030 Phase-out and TECH 2035 Phase-out scenarios resulting from our assumptions, including the densities covering the projected period.

Table 4.2: Number of HRS calculation breakdown in the TECH 2030 Phase-out scenario

Variable	Type	2020	2030	2040	2050
Vehicle stock (000s)	All	19,490	24,686	26,328	26,534
Vehicle stock (000s)	FCEVs	5	486	1,143	1,306
Share of vehicle stock	FCEVs	0.0%	2.0%	4.3%	4.9%
Infrastructure density (FCEVs per HRS)	50 kg / day	100	100	150	150
	100 kg / day	200	250	300	300
	500 kg / day	1,000	1,250	1,500	2,000

Total number of HRS	50 kg / day	-	-	23	-
	100 kg / day	-	-	59	-
	500 kg / day	-	-	1,800	3,326
	Total	0	0	1,882	3,326


Table 4.3: Number of HRS calculation breakdown in the TECH 2035 Phase-out scenario

Variable	Type	2020	2030	2040	2050
Vehicle stock (000s)	All	19,490	24,686	26,328	26,534
Vehicle stock (000s)	FCEVs	5	297	957	1,278
Share of vehicle stock	FCEVs	0.0%	1.2%	3.6%	4.8%
Infrastructure density (FCEVs per HRS)	50 kg / day	100	150	150	150
	100 kg / day	200	250	300	300
	500 kg / day	1,000	1,250	1,500	2,000
Total number of HRS	50 kg / day	-	-	23	-
	100 kg / day	-	-	59	-
	500 kg / day	-	-	1,800	3,326
	Total	0	0	1,882	3,326

Financing refuelling station deployment

The number of additional hydrogen refuelling stations in each year, in line with the projected deployment of 50 kg /day, 100 kg / day, and 500 kg / day HRS, is multiplied by the projected capital costs per station (see Figure 4.2) in each year to derive the annual investment requirements needed to support the FCEV fleet in the scenarios. Figure 4.3 shows the cumulative investment requirements over the projected periods in the TECH 2030 Phase-out and in the TECH 2035 Phase-out scenarios.

Figure 4.3 Cumulative investment requirements to support the FCEV fleet in the TECH 2030 Phase-out (left) and TECH 2035 Phase-out (right) scenarios

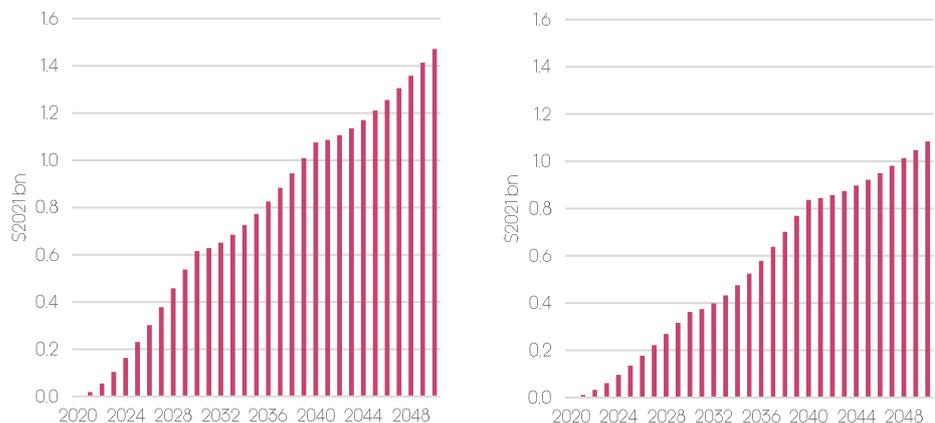


As with public and rapid EV charging infrastructure, we assume that the costs of hydrogen infrastructure are fully passed on to customers: the cost of infrastructure in shopping centres and motorway services is ultimately paid for by an increase in prices for consumers in wholesale and retail markets. However, the number of stations deployed in the considered scenarios has minimal effect on the macroeconomic modelling given the small numbers in relation to the overall car stock.

4.3 Total cumulative investment in infrastructure

Figure 4.4 below shows the cumulative infrastructure investment requirements by scenario from 2021 to 2050. In the TECH scenarios the rapid deployment of the required infrastructure is essential to enable the penetration of EVs to the fleet. The cumulative infrastructure investment in the TECH 2030 Phase-out scenario reaches more than \$19.4 billion by 2050 while in TECH 2035 Phase-out it is \$17.4 billion. Since fewer advanced powertrains are deployed in the CPI and Reference scenarios, investment in new infrastructure is also lower (around \$9 billion in the CPI scenario and \$1.3 billion in the Reference scenario).

Figure 4.4 Total cumulative investment in infrastructure by scenario (\$2021)

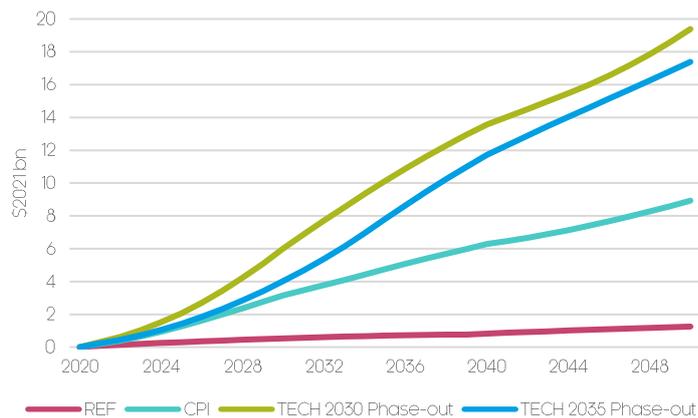

5 Socioeconomic Impacts

The economic impacts of decarbonising Korea's passenger vehicles, compared to a reference scenario (REF) in which cars remain unchanged from today, and a current policy initiatives (CPI) scenario, were modelled using E3ME.

5.1 GDP impacts

All scenarios show a net positive impact on GDP compared to the reference case. This comes from the shift in spending away from imported oil and towards a higher capital content in vehicles and spending on decarbonised fuels. The higher cost of vehicles raises prices for consumers and depresses real incomes and spending. It diverts spending towards the value chain for manufacturing vehicles and their component parts and away from other sectors of the economy. However, better fuel-efficiency lowers running costs, with positive consequences for the economy. It diverts spending away from oil supply chains and towards other areas of the economy. Since oil is imported into Korea while the decarbonised fuels are largely produced domestically, the shift in spending on fuel boosts the Korean economy and is reflected in an improvement in the balance of trade. A summary of the main economic indicators is presented in Table 5.1.

Table 5.1: Macroeconomic indicators

	CPI	TECH 2030 Phase-out	TECH 2035 Phase-out
2030 Impacts	<i>(relative to REF)</i>		
GDP (%)	0.12%	0.19%	0.12%
Employment (000s)	17	40	26
Oil Imports (%)	-13.6%	-26.0%	-16.1%
CO ₂ emissions from passenger cars (mtCO ₂)	-51	-87	-54
	CPI	TECH 2030 Phase-out	TECH 2035 Phase-out
2050 Impacts	<i>(relative to REF)</i>		
GDP (%)	0.19%	0.27%	0.26%
Employment (000s)	25	59	57
Oil Imports (%)	-19.8%	-40.5%	-40.2%
CO ₂ emissions from passenger cars (mtCO ₂)	-494	-932	-801

The scale of the long-term economic impacts is uncertain, depending on a number of factors: the cost of vehicles and low-carbon technologies (including EV batteries); the location of vehicle supply chains, and future oil, hydrogen and electricity prices, to name a few. However, the dominant impact arises

from the reduction in oil imports. This is evident in the macroeconomic results in which the GDP impacts tend to follow oil imports in the CPI and TECH scenarios. The ambitious TECH scenarios yield the greatest economic benefits in the long-run in terms of the impact on both GDP and employment which comes mostly from the substantial reduction in oil imports. Although their overall economic impacts are much alike, the TECH 2030 Phase-out scenario has the largest benefits and CO₂ emissions are substantially lower as well.

Figure 5.1 below shows the GDP impacts under different scenarios. In all scenarios the initial impact is negative, as the impact of more expensive vehicles is greater than the fuel savings associated with the more energy efficient vehicles. Negative GDP impacts are smallest in the CPI scenario in the short run, due to the slower transition achieved in this scenario. In later years, as the benefits of the transition away from ICEs such as reduced demand for imported fossil fuels take hold, the outcomes from the TECH scenarios are better than those achieved in the CPI case. In the TECH 2030 phase-out scenario, by 2030, there is a modest (0.2%) increase in GDP compared to the Reference, as the economic benefits of reduced spending on oil and petroleum imports outweigh the negative economic impacts associated with higher vehicle prices. Similarly, the GDP impacts in the TECH 2035 Phase-out scenario surpass the CPI scenario by the mid 2030s. By 2050 both TECH scenarios achieve similar outcomes, with GDP approaching 0.3% higher than baseline. Between 2030 and 2050 spending on imported fuels falls further due to continued improvement in efficiency of the stock and a continued shift away from ICEs and towards BEVs and FCEVs.

Figure 5.1 GDP results relative to the Reference scenario



Note that these scenarios do not consider explicitly the impact of changing demand in the rest of the world; for example, if Korean vehicle demand was following the REF or CPI trajectory (where domestic vehicle sales continue to be dominated by combustion engine vehicles), but demand in the rest of the world was shifting in favour of battery electric vehicles, it's likely that demand for exports from the Korean motor vehicle industry would be reduced, lowering GDP, but these effects are not quantified. The same is not true in reverse. however; i.e. if global demand remained focussed on ICEs while Korean demand pivoted to BEVs, given the existing production facilities for ICEs it should remain possible to continue to export these vehicles while meeting different domestic demand. As such, the risks are asymmetric, and largely

limited to Korean firms not adapting to changing demand in the rest of the world.


5.2 Employment

The pattern of impacts on employment, while related to the output impacts, are somewhat different. To assess the impact on employment, we also need to take account of the different employment intensities in the various sectors that are affected, as well as potential wage effects. The latter means that typically employment effects are smaller (in percentage terms) than output effects, as part of (for example) higher output in an economy is absorbed by workers as higher wages.

The trend towards greater automation in the auto industry is expected to reduce the number of jobs, even ignoring the effects of a low-carbon transition. This trend will be exacerbated by a switch towards BEVs. Building battery-electric vehicles is less labour intensive than building the gasoline and diesel vehicles they will replace, while building hybrids and plug-in hybrids is expected to be more labour intensive. Previous modelling in the Fuelling Europe’s Future study showed that the net employment impact for the auto sector from the transition depends on the market shares of these various technologies, and the degree to which they are imported or produced domestically.

Figure 5.2 shows the evolution of jobs in Korea as a result of the transition to low-carbon cars in the TECH 2035 Phase-out scenario, relative to the reference case. There is a net increase over time in employment in manufacturing sectors, linked the manufacture of more complex vehicles, and a substantial increase in services employment, which arises as a result of lower mobility costs in later years allowing consumers to shift expenditure into the consumption of other goods and services.

Figure 5.2 The employment impact per sector of the transition to low-carbon cars (TECH2035 compared to REF)

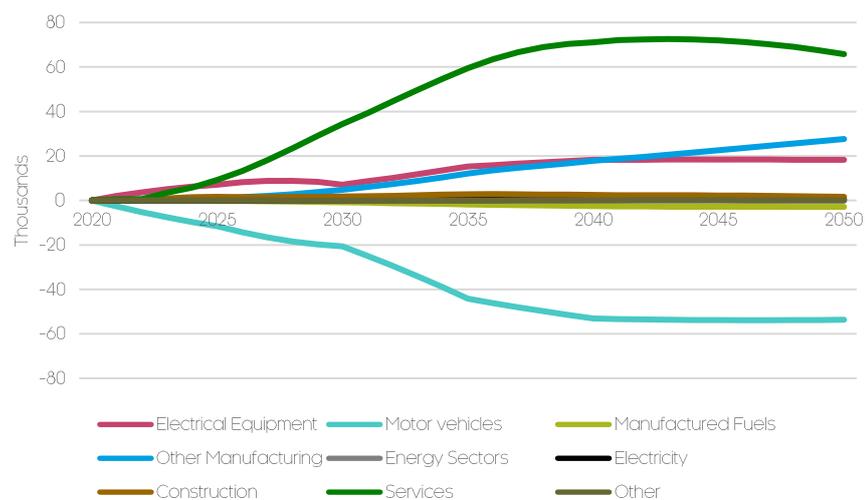

In contrast, employment in the motor vehicle sector steadily decreases in TECH 2035 Phase-out scenario. In the TECH scenarios, the net impact on motor vehicle sector jobs is negative because ICEs and hybrids are increasingly replaced by battery-electric vehicles, which have different supply

chains (as seen by increased employment in electrical equipment and other manufacturing) and are simpler to build and therefore generate fewer traditional motor vehicle jobs.


Employment impacts within the motor vehicle sector are an important issue. The benefit of using a macroeconomic modelling approach is that it allows us to assess the economy-wide impacts of this transition. For the low-carbon transition to be successful, care will need to be taken to support those who lose their jobs in technologies that are phased out. Managing the switch in the motor vehicles industry, to ensure a “just transition”, should be a key focus of policy, particularly against an overall background of increasing automation.

The largest number of jobs are created in services. These primarily come about as a result of the low cost of mobility; because the total cost of ownership of BEVs is lower than an ICE, consumers are spending less on transport, which frees up household income to be spent on other goods and services. A large proportion of this income is then spent on consumer services, such as hotels & restaurants, increasing demand and creating jobs. There are further service jobs created in business services through supply chains to other parts of the economy, but these are secondary in scale compared to addition jobs in consumer services.

5.3 Fossil fuel imports

By 2030, in the TECH 2035 Phase-out scenario annual fossil fuel imports are reduced by around 54 mboe, while in the CPI scenario a reduction of 46 mboe is seen compared to the Reference scenario. A more rapid phase out, by 2030, reduces imports more rapidly, and in the TECH 2030 Phase-out scenario the equivalent reduction is 87 mboe. By 2050, the reduction in annual fossil fuel imports compared to the Reference case increases to around 210 mboe in both TECH scenarios (Figure 5.3).


Figure 5.3 Annual fossil fuel import savings (difference from REF)

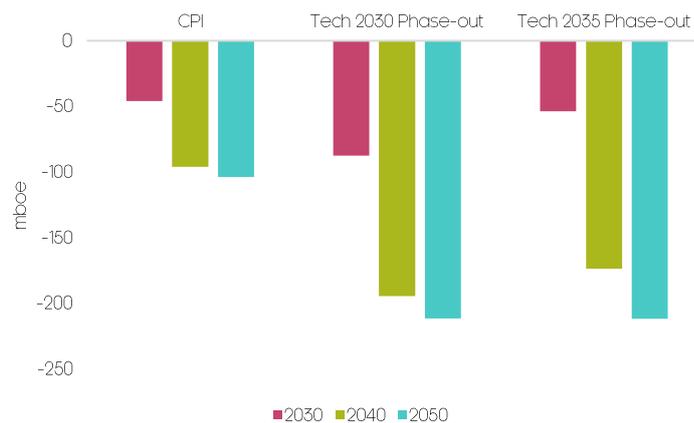

This will lead to cumulative fossil fuel import savings of around 329 mboe by 2030 in the TECH 2030 Phase-out scenario, 201 mboe and 183 mboe reductions in the TECH 2035 Phase-out and CPI scenarios, respectively. By 2050, although the annual fossil fuel savings are almost identical in the TECH scenarios, the cumulative reduction in fossil fuel imports compared to the Reference case increases to 3,436 mboe in the TECH 2035 Phase-out


scenario while in the most ambitious TECH 2030 Phase-out scenario it is substantially greater, at 3,961 mboe (see Figure 5.5).

Figure 5.5 Cumulative fossil fuel import savings over time (difference from REF)

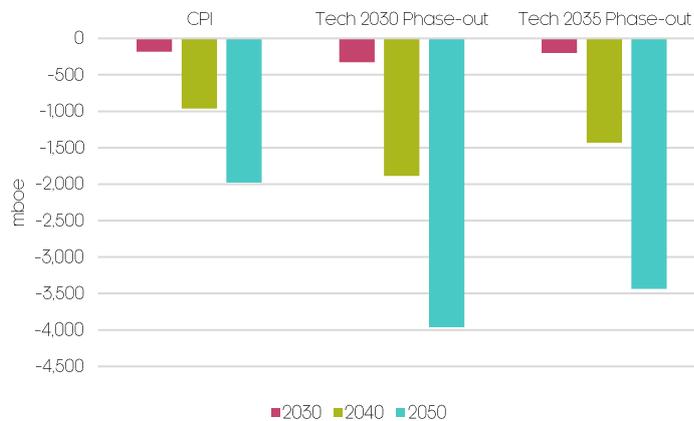

Focusing on oil, the import savings are even more substantial. In the CPI scenario annual oil import savings remain around 20% as HEVs fuelled by gasoline are still dominant in 2050. However, the transition to electricity from gasoline and diesel reduces the demand for oil, and thus in both TECH scenarios annual oil import decreases by more than 40% by 2050 compared to the baseline. Consequently, the deployment of advanced powertrain cars reduces the dependency on oil of the Korean economy.

Figure 5.4 Annual oil import savings (% difference from REF)

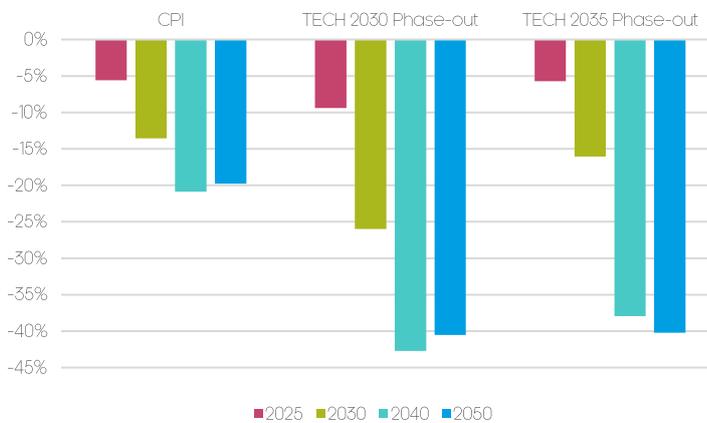

5.4 Government revenues

Fuel tax is a significant proportion of government revenues. However, it is frequently subject to the whims of politicians. In November 2018 the Korean Government temporarily lowered fuel taxes by 15% for 6 months, in theory to ease the burden of rising global oil prices on households and small businesses. Later the tax cut was extended by the government until the end of August 2019 when it was ended (though from May it slashed the fuel tax only by 7 percent). As a result, in the first half of 2019, South Korea collected 1 trillion won less compared with a year earlier⁷.

⁷ [Petrol World - S. Korea: Govt To End Temporary Fuel Tax Cut](#). Accessed 18/08/2021

Vehicle efficiency improvements and a switch to low-carbon vehicles will reduce spending on petrol and diesel fuels with consequent impacts on tax revenues. In our macroeconomic modelling, this reduction in revenues is balanced out via increasing taxes in other parts of the economy; the economic results presented above occur even though there is no change in the government balance in these scenarios. The reduction in fuel tax revenues is mostly compensated by the higher income tax revenues, some of which accrue due to the positive economic impacts of the low carbon transition, but which is bolstered by a slight increase in the rate of effective income tax in Korea. Furthermore, the Korean government could attempt to recoup the lost revenue directly through other taxes on the same group of consumers, for example road charging. The net economic effect would depend on which taxes are changed; road charging for example would increase the cost of transportation, and therefore reduce consumption in other areas of the economy compared to the current scenarios. This highlights the importance of industry, government and civil society working together to find consensus on the optimal approach.


6 Environmental Impacts

6.1 Impact on CO₂ emissions

Average emissions

The evolution of average CO₂ emissions for new cars in each scenario are shown in Figure 6.1. Tailpipe emissions drop to zero in the TECH scenarios after the phase out of ICEs, however, average CO₂ emissions of new cars in the CPI scenario decrease to 68gCO₂/km by 2030 and remain unchanged for the rest of the projection period.


Figure 6.1: Average CO₂ emissions of new cars (gCO₂/ km)

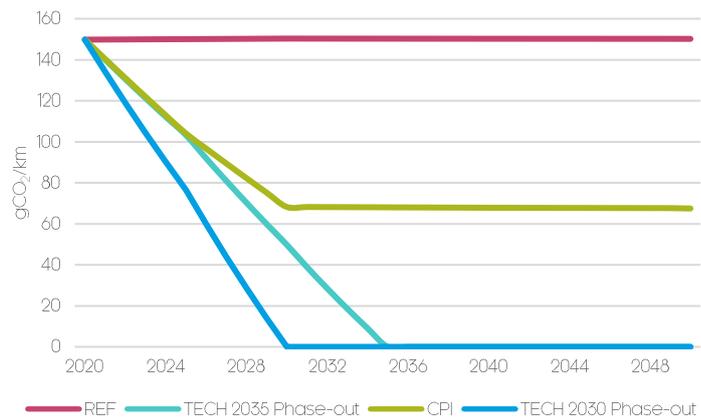

Annual stock CO₂ emissions

Tailpipe emissions of new cars are zero after the phase-out in the TECH scenarios; however, the tailpipe emissions of the total vehicle stock come down much more slowly, as it takes time for remaining ICEs to leave the stock.

Figure 6.2 Annual stock tailpipe CO₂ emissions (KtCO₂)

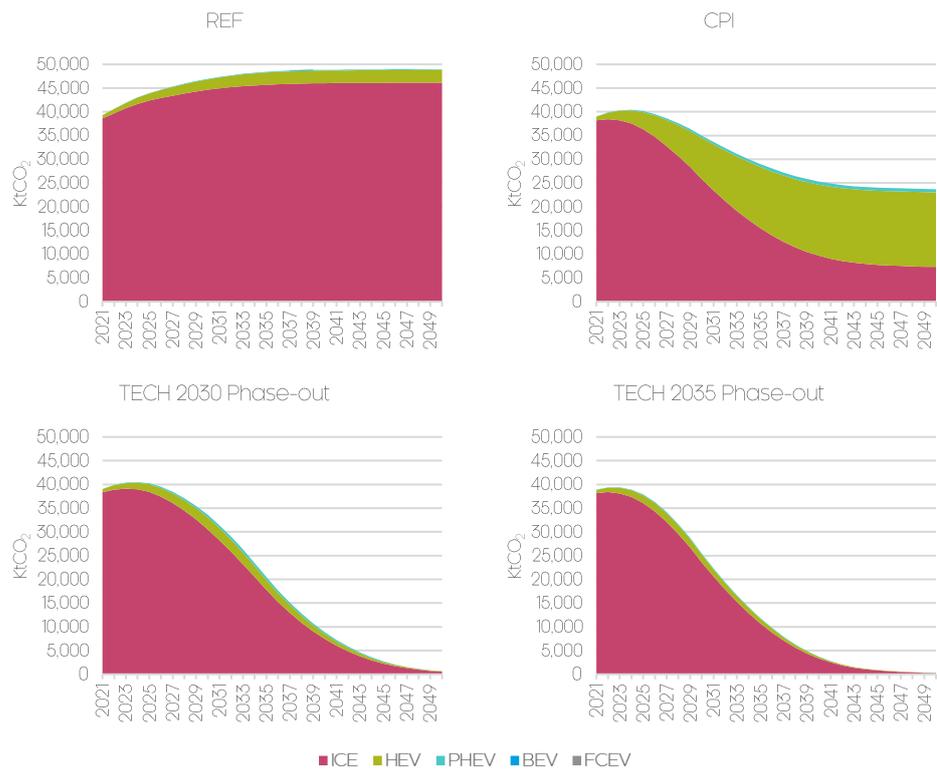

By 2030, annual CO₂ emissions of the stock are reduced by 26% if the current policy targets are met, and by over 46% with the phase-out of ICEs in 2030 and by 29% if the phase-out happens in 2035 compared to the Reference scenario (Figure 6.2). By 2050 stock tailpipe emissions falls by more than 98% in the TECH scenarios compared to the CPI scenario.

Figure 6.2 only presents the tailpipe emissions of the vehicle stock while the associated CO₂ emissions of electricity generation is considered in section 7.1

6.2 Impacts on emissions of particulate matter and nitrogen oxides

Particulate matter (PM₁₀) and nitrogen oxides (NO_x) emitted from road transport have a substantial impact on local air quality with harmful consequences for human health in many urban centres. The reduction of both pollutants is a substantial co-benefit of decarbonising passenger cars.

In the CPI scenario, particulate matter emissions (PM₁₀) from vehicle exhausts are cut from around 511 t per year in 2020 to around 271 t in 2050 (see Figure 6.3) and NO_x emissions from vehicle exhausts are cut from 13,882 t in 2020 to 6,226 t in 2050 (see Figure 6.4). Nevertheless, in the TECH scenarios both values fall by 99%, almost eliminating all harmful PM₁₀ and NO_x emissions. This is mainly achieved by the transition away from petrol and diesel vehicles towards zero emissions electricity and hydrogen.

Figure 6.3 PM₁₀ emission reductions from baseline in 2020 by scenario (%)


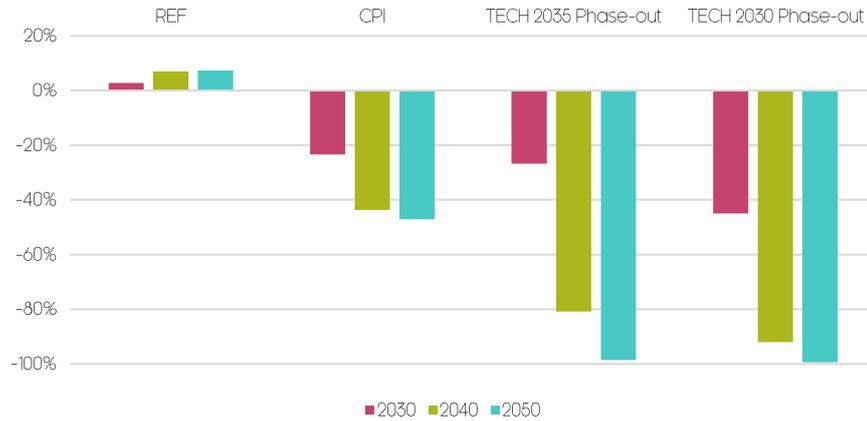


Figure 6.4 NO_x emission reductions from baseline in 2020 by scenario (%)

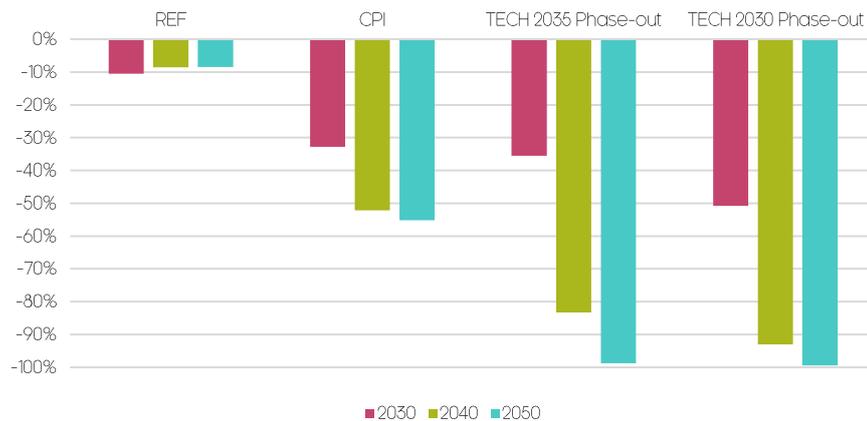

It is worth noting that the particulate emissions that we model only refer to *tailpipe* emissions. While substantial, they are only one source of local air pollutants from road transport. The largest source of emissions of particulates from road transport is tyre and brake wear and road abrasion which have been shown to account for over half of total particulate matter emissions.

7 The Power Sector

7.1 Emissions associated with the consumption of electricity

By considering the evolution of the power sector, and the role played by fossil fuel and low-carbon sources of electricity, it is possible to calculate the indirect emissions associated with the use of electricity in electric vehicles, in addition to the tailpipe CO₂ emissions of ICE vehicles. In this section we estimate the indirect CO₂ emissions associated with the production of the electricity used as fuel by the PHEV, BEV and FCEV cars in the Korean stock.

As presented in Section 3.6, two electricity generation mixes are considered. In the first, 'Central' case, the absence of additional decarbonisation policies leads to a power mix which relies heavily on fossil fuels, such as coal and natural gas. In the second 'Decarbonised' scenario, electricity is sourced from an increasingly decarbonised grid, with electricity increasingly being produced from renewables, and low carbon power from other sources, such as through an interconnector with neighbouring countries or imports of low carbon fuels.

The decarbonisation of the power sector has a major impact on the emissions footprint of EVs, since the penetration of EVs substantially increases the electricity consumption of the vehicle fleet. Although the tailpipe emissions of BEVs are zero, if the electricity is not zero emission then the well-to-wheel emissions that include the emissions associated with the generation of electricity can still be significant.

Figure 7.1 and Figure 7.2 present the indirect emissions for each passenger car sales mix scenario with the 'Central' and in the 'Decarbonised' power sector mixes. The indirect emissions in the REF scenarios are very small due to the low number of EVs in the stock, while in the CPI indirect emissions are moderate (around 18 MtCO₂) and in the TECH scenarios the annual emissions almost reach 35 MtCO₂ by 2050 under a 'business as usual' power generation mix. However, in the 'Decarbonised' power sector scenario emissions are very small, even in the later years of the TECH scenarios. By relying on renewables and other low carbon technologies in the power sector, the annual indirect emissions of an EV-dominated fleet of passenger cars can be reduced by more than 35 MtCO₂ by 2050.

Figure 7.1 Annual indirect CO₂ emissions by scenario ('Central' power sector scenario)

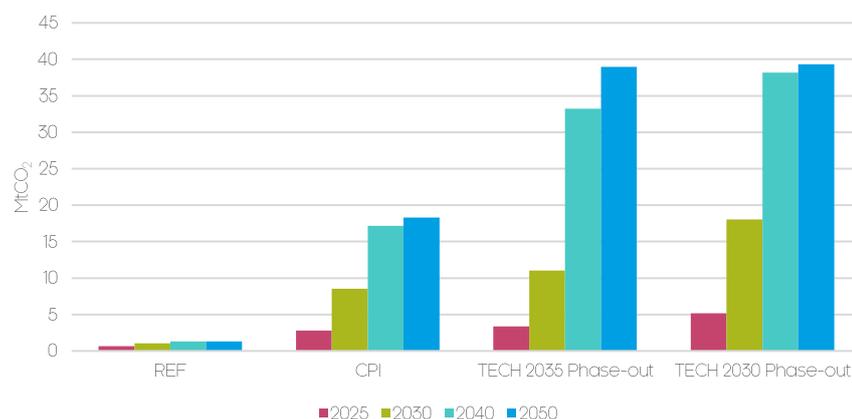


Figure 7.2 Annual indirect CO₂ emissions by scenario ('Decarbonised' power sector scenario)



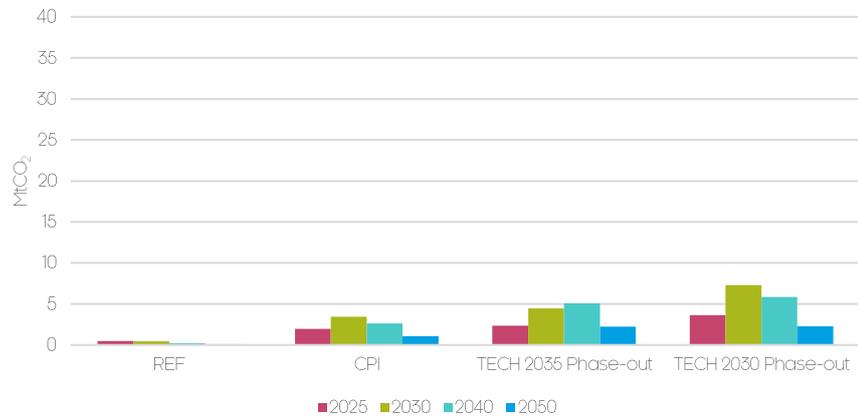


Figure 7.3 shows the cumulative well-to-wheel CO₂ emissions of the vehicle stock under the REF, CPI, TECH 2030 Phase-out, and TECH 2035 Phase-out scenarios in the ‘Central’ scenario for the power sector, expressed in MtCO₂. It shows that, even when considering power generation emissions for transport fuels from a ‘business as usual’ power sector, the increase in indirect emissions is small, and more than compensated by the reductions in direct (tailpipe) emissions, with emissions much lower in both the CPI and TECH scenarios than the REF case over the period to 2050.

Figure 7.3: Cumulative CO₂ well-to-wheel emissions reductions compared to the baseline scenario ('Central' power sector scenario)

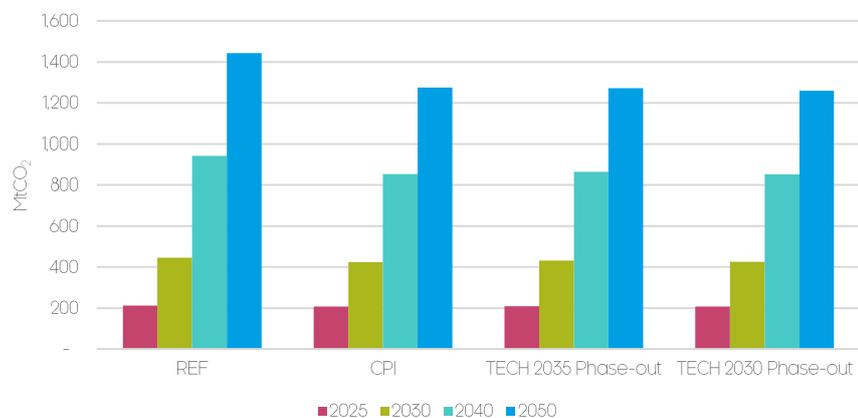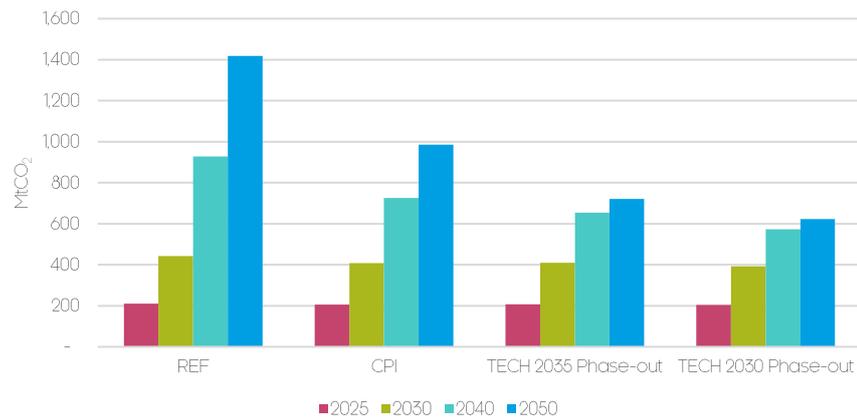

When considering a progressively decarbonised electricity system, the overall reduction in the well-to-wheel emissions compared to the baseline becomes even more substantial, as depicted in Figure 7.4. By decarbonising the power sector, the emissions associated with passenger cars further decrease by more than 635 MtCO₂ compared to the ‘Central’ power mix, when considering the most rapid deployment of BEVS under the TECH 2030 Phase-out scenario.

Figure 7.4: Cumulative CO₂ well-to-wheel emissions reductions in the TECH 2030 Phase-out scenario ('Decarbonised' power sector scenario)

7.2 Economic impacts with a decarbonised power sector

In this section we assess the economic impacts of decarbonising Korea's passenger vehicles in a scenario where the power sector is decarbonised in both the baseline and the TECH 2030 Phase-out scenario. This way we can assess the overall impact of decarbonisation on the electrification of the passenger car market.

When considering the 'Decarbonised' scenario for the power sector, the overall economic impacts are similar to seen in the 'Central' scenario (repeated below, but as also shown in Chapter 5). Phasing out the sale of ICE cars by 2030 has positive impacts on both the GDP and employment. By 2050, the economic impacts are almost exactly the same; however, in 2030 the impacts on GDP are slightly larger in a decarbonised electricity sector, reflecting higher investment in low-carbon generation technologies, while the increase in employment is slightly smaller than in the Central case. This occurs because electricity is slightly more expensive, resulting in less money being reallocated away from fuelling (electric) vehicles and towards consumer services – while jobs are created in the electricity sector, this is less labour intensive than the service sector, so the net increase in jobs is smaller (see Table 7.1).

Although it is not included in the current analysis, the decarbonisation of the power sector can have further positive impacts on the Korean economy. This is due to the benefit stemming from investment in low carbon and renewable technologies in power generation. The increased investment activity and the lower fossil fuel imports boost domestic demand, output and employment leading to positive economic results.

Table 7.1: Macroeconomic indicators with a decarbonised power sector

	TECH 2030 Central power mix	TECH 2030 Decarb power mix
2030 Impacts		
GDP (%)	0.19%	0.34%
Employment (000s)	40	26
	TECH 2030 Phase-out	
2050 Impacts		
GDP (%)	0.27%	0.26%
Employment (000s)	59	59

8 Conclusions

This study assessed the potential benefits of decarbonising passenger vehicles in Korea.

The analysis showed that the phase-out of non-zero emission cars is both economically and environmentally desirable. The technology transitions of the TECH 2030 Phase-out and TECH 2035 Phase-out scenario yielded small net positive economic outcomes, which is made possible by the reduction in spending on imported oil as well as less overall spending by households on car ownership, and more on other goods and services. Furthermore, lowering Korea's dependence on imported oil, and replacing it with domestically generated electricity, can improve its energy security.

Although the GDP impacts of the two scenarios are almost identical by 2050, the earlier phase-out of petrol and diesel cars leads to substantially higher CO₂ emissions reductions. The penetration of EVs also improves local air quality, leading to substantial improvements in human health outcomes.

We also compared the socioeconomic and environmental impacts under different assumptions about the future of Korean electricity generation. While the environmental benefits are greater under a decarbonised grid, the macroeconomic impacts of the transition are broadly similar whether the grid is relatively high- or low-carbon – although it should be noted that no additional policies (e.g., carbon pricing) are introduced in order to drive the decarbonisation of the grid. Such policies could affect the impacts of the transition (in the carbon price example, by making the use of fossil fuels more expensive), but was beyond the scope of this analysis.

This analysis demonstrates that there are substantial benefits, both economic and environmental, that can result from a rapid phase-out of the sale of combustion engine vehicles and their replacement with a fleet of more efficient vehicles dominated by battery electric vehicles; and that the long-term implications of the transition for the economy are small but positive. However, the small net changes in the economy do include larger sectoral changes, and it will be necessary to manage the changes in sectoral employment, e.g., by providing training opportunities so that workers engaged in industries linked to the production and supply of internal combustion engines and fossil fuels can re-train to find jobs in the low-carbon economy of the future.

Appendices

Appendix A E3ME model description

E3ME is a computer-based model of the world's economic and energy systems and the environment. It was originally developed through the European Commission's research framework programmes and is now widely used in Europe and beyond for policy assessment, for forecasting and for research purposes

A.1 Policy decisions that can be informed by the models

E3ME is often used to assess the impacts of climate mitigation policy on the economy and the labour market. The basic model structure links the economy to the energy system to ensure consistency across each area.

Possible policies to assess include:

- Carbon and energy taxes
- Emission trading systems
- Environmental tax reforms
- Energy efficiency programmes
- Subsidies for particular technologies in the power, transport and residential sectors
- Phase-outs of particular fuels and other direct regulation
- Resource efficiency programmes

Policy changes that have been influenced by the findings/application of the models

Recent E3ME contributions include the EU's Impact Assessment of the 2030 climate and energy package and also the EU's long-term strategy for achieving net-zero emissions. It has also been used in official reviews of the Energy Efficiency Directive and Energy Performance in Buildings Directive (EPBD) that fed into the EU's Clean Energy Package. Increasingly the model has been applied for analysis outside the EU, for example by IRENA and in the 2018 New Climate Economy report.

A.2 A summary appraisal of the range of results the model can offer;

As a global E3 (energy-environment-economy) model, E3ME can provide comprehensive analysis of policies;


- direct impacts, for example reduction in energy demand and emissions, fuel switching and renewable energy
- secondary effects, for example on fuel suppliers, energy price and competitiveness impacts
- rebound effects of energy and materials consumption from lower price, spending on energy or higher economic activities
- overall macroeconomic impacts; on jobs and economy including income distribution at macro and sectoral level.

A.3 Theoretical underpinnings

Economic activity undertaken by persons, households, firms and other groups in society has effects on other groups (possibly after a time lag), and the effects may persist into future generations. But there are many actors and the effects, both beneficial and damaging, accumulate in economic and physical stocks.

The effects are transmitted through the environment, through the economy and the price and money system (via the markets for labour and commodities), and through global transport and information networks. The markets transmit effects in three main ways: through the level of activity creating demand for inputs of materials, fuels and labour; through wages and prices affecting incomes; and through incomes leading in turn to further demands for goods and services. These interdependencies suggest that an E3 model should be comprehensive and include many linkages between different parts of the economic and energy systems.

The figure below provides a schematic of an idealised model. The current version of the model includes only limited treatment of physical damages (which are often instead calculated off-model) and of pollution-abatement equipment (which is specified exogenously by the model user). These issues remain areas for future development.

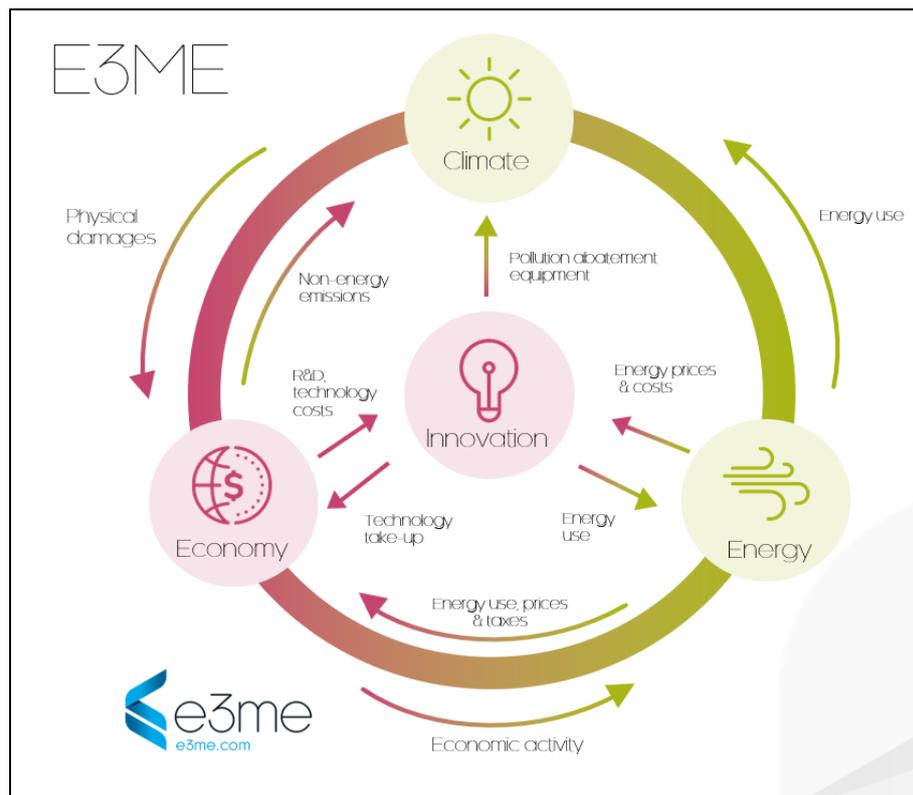


E3ME is often compared to Computable General Equilibrium (CGE) models. In many ways the modelling approaches are similar; they are used to answer similar questions and use similar inputs and outputs. However, underlying this there are important theoretical differences between the modelling approaches.

In a typical CGE framework, optimising behaviour is assumed, output is determined by supply-side constraints and prices adjust fully so that all the available capacity is used. In E3ME the determination of output comes from a

post-Keynesian, demand-driven accounting framework and it is possible to have spare capacity in the economy (see figure below). It is not assumed that prices always adjust to market clearing levels.

The differences have important practical implications, as they mean that in E3ME regulation and other policy may lead to increases in output if they are able to draw upon spare economic capacity. This is described in more detail in the model manual.

The econometric specification of E3ME gives the model a strong empirical grounding. E3ME uses a system of error correction, allowing short-term dynamic (or transition) outcomes, moving towards a long-term trend. The dynamic specification is important when considering short and medium-term analysis (e.g. up to 2020) and rebound effects, which are included as standard in the model's results.

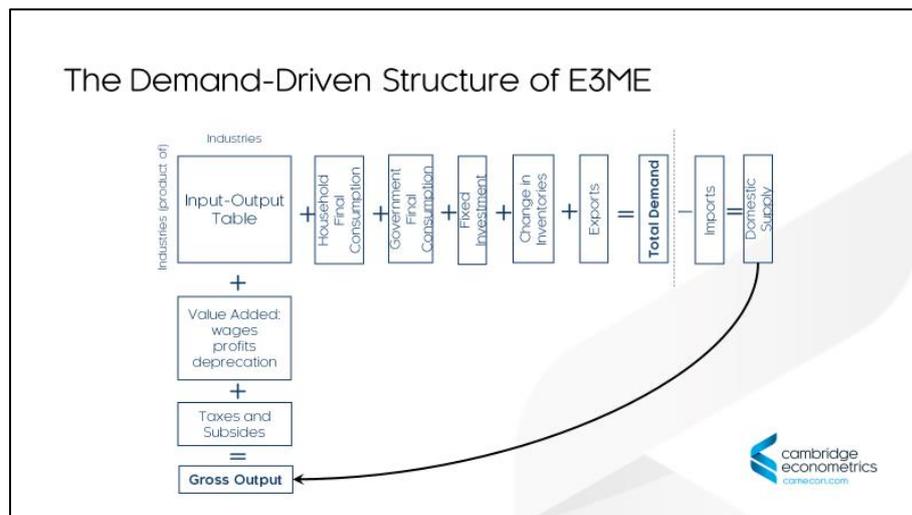

A.4 Summary of key strengths

- The close integration of the economy, energy systems and the environment, with two-way linkages between the economy and energy system.
- The detailed sectoral disaggregation in the model's classifications, allowing for the analysis of similarly detailed scenarios.
- Its global coverage, while still allowing for analysis at the national level for large economies (70 regions total).
- The econometric approach, which provides a strong empirical basis for the model and means it is not reliant on some of the restrictive assumptions common to CGE models.
- The econometric specification of the model, making it suitable for short and medium-term assessment, as well as longer-term trends.

A.5 Key limitations

As with all modelling approaches, E3ME is a simplification of reality and is based on a series of assumptions. Compared to other macroeconomic modelling approaches, the assumptions are relatively non-restrictive as most relationships are determined by the historical data in the model database. This

does, however, present its own limitations, for which the model user must be aware:

- The quality of the data used in the modelling is very important. Substantial resources are put into maintaining the E3ME database and filling out gaps in the data. However, particularly in developing countries, there is some uncertainty in results due to the data used.
- Econometric approaches are also sometimes criticised for using the past to explain future trends. In cases where there is large-scale policy change, the ‘Lucas Critique’ that suggests behaviour might change is also applicable. There is no solution to this argument using any modelling approach (as no one can predict the future) but we must always be aware of the uncertainty in the model results.

The other main limitation to the E3ME approach relates to the dimensions of the model. In general, it is very difficult to go into a level of detail beyond that offered by the model classifications. This means that sub-national analysis is difficult and detailed sub-sectoral analysis is also difficult. Similarly, although usually less relevant, attempting to assess impacts on a monthly or quarterly basis would not be possible.

A.6 Basic structure and data

The structure of E3ME is based on the system of national accounts, with further linkages to energy demand and environmental emissions. The labour market is also covered in detail, including both voluntary and involuntary unemployment. In total there are 33 sets of econometrically estimated equations, also including the components of GDP (consumption, investment, international trade), prices, energy demand and materials demand. Each equation set is disaggregated by country and by sector.

E3ME’s historical database covers the period 1970-2018 and the model projects forward annually to 2050. The main data sources for European countries are Eurostat and the IEA, supplemented by the OECD’s STAN database and other sources where appropriate. For regions outside Europe, additional sources for data include the UN, OECD, World Bank, IMF, ILO and national statistical agencies. Gaps in the data are estimated using customised software algorithms.

The main dimensions of E3ME are:

- 70 countries – all G20 and major world economies, the EU28 and candidate countries plus other countries’ economies grouped
- 44 (or 70 in Europe) industry sectors, based on standard international classifications
- 28 (or 43 in Europe) categories of household expenditure
- 22 different users of 12 different fuel types
- 14 types of air-borne emission (where data are available) including the 6 GHG’s monitored under the Kyoto Protocol

A.7 Key outputs

As a general model of the economy, based on the full structure of the national accounts, E3ME can produce a broad range of economic indicators. In

addition, there is range of energy and environment indicators. The following list provides a summary of the most common model outputs:

- GDP and the aggregate components of GDP (household expenditure, investment, government expenditure and international trade)
- sectoral output and GVA, prices, trade and competitiveness effects
- international trade by sector, origin and destination
- consumer prices and expenditures
- sectoral employment, unemployment, sectoral wage rates and labour supply
- income distribution
- energy demand, by sector and by fuel, energy prices
- raw material demand by sector and by material types
- power generation mix
- passenger cars and heating technologies
- CO2 emissions by sector and by fuel
- other air-borne emissions

This list is by no means exhaustive and the delivered outputs often depend on the requirements of the specific application. In addition to the sectoral dimension mentioned in the list, all indicators are produced at the national and regional level and annually over the period up to 2050.

Linking E3ME to bottom up technologies submodules (FTTs)

Since 2012, the power sector in E3ME has been represented using a novel framework for the dynamic selection and diffusion of innovations, initially developed by J.-F. Mercure (Mercure, 2012), called FTT:Power (Future Technology Transformations for the Power sector). This is the first member of the FTT family of technology diffusion models. The current E3ME model version is also linked up to FTT:Transport, FTT: Steel and FTT:Heat.

Drawing on an evolutionary approach, the FTT models use a decision-making core for investors or households facing several options in their purchasing decisions. The model is based on theories of technology diffusion, with rates of diffusion affected by relative market shares and technology prices. The detailed technology representation allows for a range of policy options.

Many of the policies are characterised by long lag times due to the lifetimes of the technologies that are built. However, the model can show rapid transitions as technologies gain market penetration, reinforced by cost reductions that result from learning rates.

The resulting diffusion of competing technologies is constrained by a global database of renewable and non-renewable resources (Mercure & Salas, 2012, 2013).

A.8 Ongoing model developments

The current planned development for E3ME is:

- a new land-allocation module for the agricultural sector, building on the current generation of FTT models
- a bottom-up module for the chemicals sector (FTT:Chemicals)
- expansion of the FTT:Transport sub-model to cover freight as well as passenger road transport
- data updates to reflect the publication of data covering the period of covid-19

A.9 Model manual

A technical model manual of E3ME is available online at www.e3me.com.